



**GOOD
DESIGN
AWARD®
WINNER**



VL-60 & VL-75 Aluminium Wall & Ceiling Expansion Joint Covers

VL Series wall and ceiling expansion joint covers are designed for internal and external applications, they can carry a secondary wind/vapour barrier, they are usually considered for installation on block work walls or internally in cement sheet walls, but are suitable for installation in most applications.



Features



Multidirectional
6-way Movement



Indoor Use



Water Gutter
Available




Outdoor Use

VL & DVL Application

- Expansion joint covers.
- Both can carry a concertinaed water/wind barrier if required.
- The DVL expansion joint cover features a spring steel tie bar that prevents sagging of the Santoprene inserts.

Materials

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.
- Standard grey Santoprene inserts, or black inserts available on request.

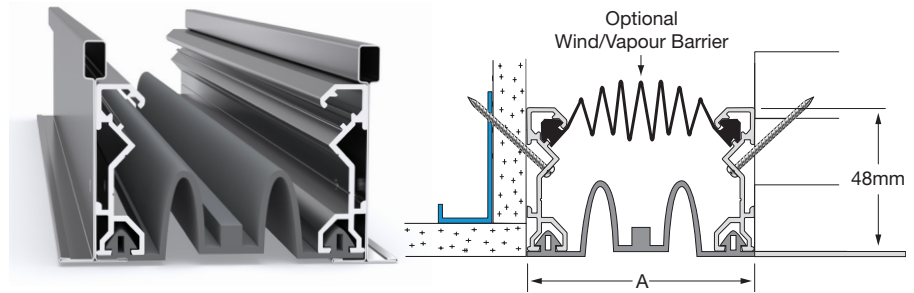


Illustrated: VL-75

TECHNICAL CHARACTERISTICS

Aluminium Code	A	Movement	Total Available Movement
VL-60	60	+50/-25mm	75mm
VL-75	75	+50/-25mm	75mm

All dimensions in millimetres.
All mechanical expansion joint fixings by others.

DVL-120 & DVL-150 Aluminium Wall & Ceiling Expansion Joint Covers

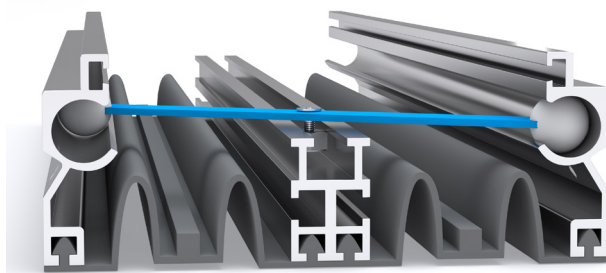


Illustrated: DVL-150

TECHNICAL CHARACTERISTICS

Aluminium Code	A	Movement	Total Available Movement
DVL-120	120	+/-50mm	100mm
DVL-150	150	+/-50mm	100mm

DVL Series wall and ceiling expansion joint covers are designed for internal and external applications, they can carry a secondary wind/vapour barrier, they are usually considered for installation on block work walls or internally in cement sheet walls, but are suitable for installation in most applications.

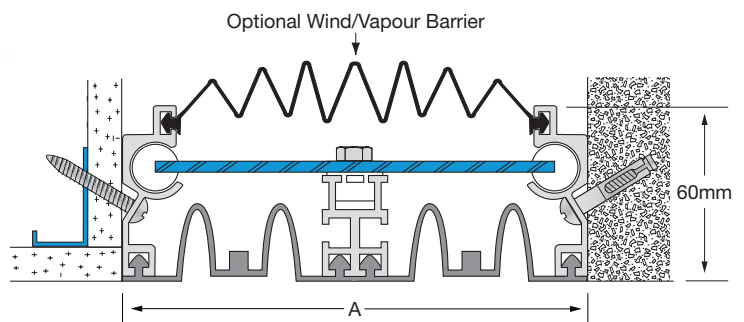

All dimensions in millimetres.
All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue