

25M to 150M Aluminium Wall & Ceiling Expansion Joint Covers



Features



Multidirectional
6-way Movement



Water Gutter
Available




Indoor Use



Outdoor Use



Fire Rateable

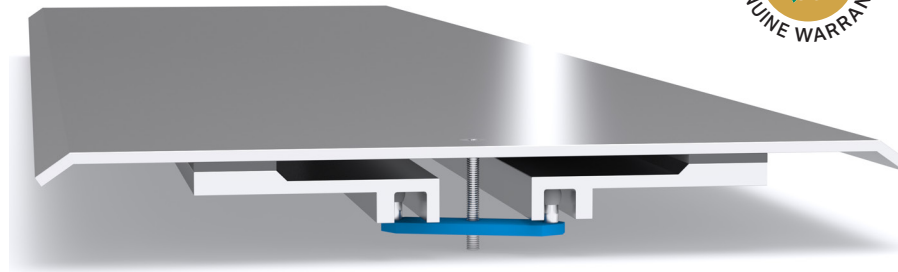

M Series wall and ceiling expansion joint covers are surface mounted covers. As standard they are supplied in mill finish aluminium. On request they can be powder coated or anodised to other colours and textures, including woodgrain. The detail below shows a 16mm x 20mm recess in the wall finish, which is only required for joints less than 62mm.

Materials


- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.
- All visual surfaces come with mill finish.
- Spring steel treated centring bar with cylindrical pins at ~475mm centres.
- Contact a Latham representative for alternative anodising or powder coating options.

Fixings

- Side members factory drilled to accept 8 gauge screw and plug at ~475mm centres.

TECHNICAL CHARACTERISTICS					Illustrated: 25M		
Aluminium Code	A	B	C	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
25M	25	235	48	+30/-17mm	47mm	12mm	2mm
50M	50	260	48	+50/-42mm	92mm	12mm	2mm
75M	75	285	48	+/-50mm	100mm	12mm	2mm
100M	100	310	48	+/-50mm	100mm	12mm	2mm
150M	150	360	48	+/-50mm	100mm	12mm	2mm

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

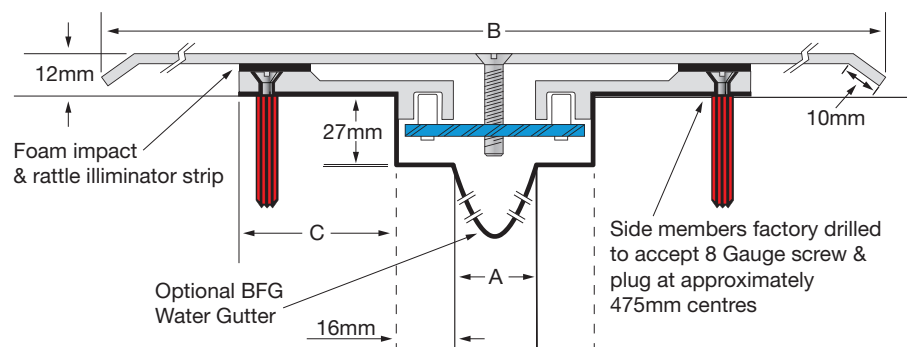

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue