

25S to 100S Aluminium Wall & Ceiling Expansion Joint Cover




Features



Multidirectional
2-way Movement



Indoor Use

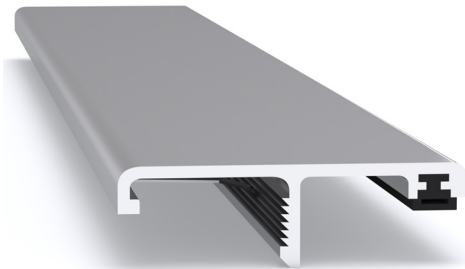

25S Visible Surface View



25S Hidden Surface View

S Series wall and ceiling expansion joint covers are designed for use in masonry, timber, cement sheet, gyprock and other hard surfaced applications. Generally intended for internal use, although if no Latham wind or water barrier is required, they can be used in external applications. As standard, they are supplied in clear anodised finish for all exposed surfaces. On request they can be powder coated or anodised to other colours and textures, including woodgrain.


TECHNICAL CHARACTERISTICS				Illustrated: 25S	
Aluminium Code	A	B	Movement	Total Available Movement	Overall Depth
25S	25	66	+/-25mm	50mm	6mm
50S	50	106	+/-40mm	80mm	6mm
75S	75	161	+/-65mm	130mm	6mm
100S	100	161	+/-40mm	80mm	6mm

Materials

- Aluminium 6063-T5 alloy.
- Supplied in 3050mm lengths.
- Stainless steel spring clips.
- All visual surfaces come with a 20-micron clear anodised finish.
- Contact a Latham representative for alternative anodising or powder coating options.

Fixings

- The joint clips onto the wall or ceiling with a pre-fixed locking mechanism, hidden from external view at ~500mm centres.

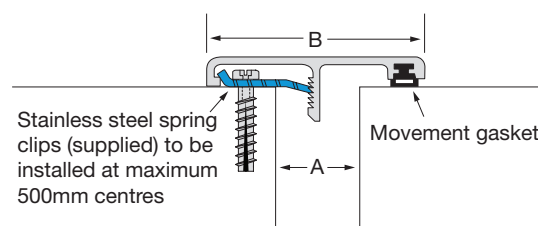

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue