

25SL to 100SL Aluminium Wall & Ceiling & Wall-to-Wall Expansion Joint Cover



Features




Multidirectional
2-way Movement



Indoor Use



25SL Visible Surface View

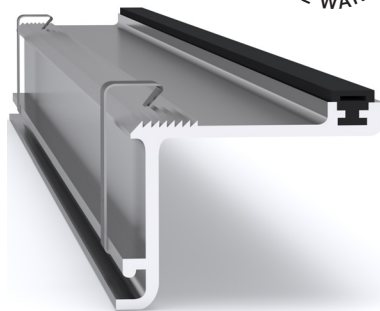

25SL Hidden Surface View

SL Series wall-to-ceiling and wall-to-wall expansion joint covers are designed for use in masonry, timber, cement sheet, gyprock and other hard surfaced applications. Generally intended for internal use, although if no Latham wind or water barrier is required, they can be used in external applications. As standard, they are supplied in clear anodised finish for all exposed surfaces. On request they can be powder coated or anodised to other colours and textures, including woodgrain.


TECHNICAL CHARACTERISTICS				Illustrated: 25SL	
Aluminium Code	A	B	Movement	Total Available Movement	Overall Depth
25SL	25	47	+/-12mm	24mm	6mm
50SL	50	75	+/-22mm	44mm	6mm
75SL	75	125	+48/-50mm	98mm	6mm
100SL	100	125	+23/-75mm	98mm	6mm

Materials

- Aluminium 6063-T5 alloy.
- Supplied in 3050mm lengths.
- Stainless steel spring clips.
- All visual surfaces come with a 20-micron clear anodised finish.
- Contact a Latham representative for alternative anodising or powder coating options.

Fixings

- The joint clips onto the wall or ceiling with a pre-fixed locking mechanism hidden from external view at ~500mm centres.

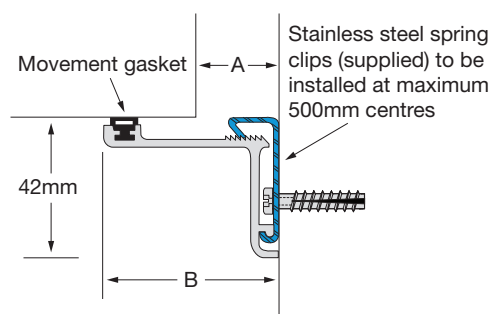

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue