

SCL Corner Wall Aluminium Wall & Ceiling Expansion Joint Covers



Stainless steel spring clips (supplied) to be installed at maximum 500mm centres.



Features



Multidirectional
2-way Movement



Indoor Use

SCL Corner Wall Surface Mounted wall and ceiling expansion joint covers are generally for internal applications only, although they can also be used for external application where Latham type water and wind barrier are not required. Surfaces come with a 20 micron clear anodised finish (standard) or brass colour anodised finish (specify brass colour finish). On request they can also be anodised or powder coated to other colours, including woodgrain. The SCL Series are designed for use in masonry, timber, cement sheet, gyprock and other hard surfaced applications. They can be made to suit other wall and ceiling installation details on site but this will depend on the actual site condition. The covers are held in place by anti-tamper one direction stainless steel springs making the system very difficult to remove once installed.

Materials

- ➔ Aluminium 6063-T5 alloy.
- ➔ Supplied in 3050mm lengths.
- ➔ Stainless steel spring clips.
- ➔ All visual surfaces come with a 20-micron clear anodised finish.
- ➔ Contact a Latham representative for alternative anodising or powder coating options.

Fixings


- ➔ The joint is held in position with tough stainless steel spring clips at ~500mm centres, which make the profiles virtually impossible to remove once installed.

TECHNICAL CHARACTERISTICS

Illustrated: 25SCL

Aluminium Code	A	B	Movement	Total Available Movement	Overall Depth
25SCL	25	53	+/-12mm	25mm	6mm
50SCL	50	90	+/-15mm	30mm	6mm

All dimensions in millimetres. All mechanical expansion joint fixings by others.

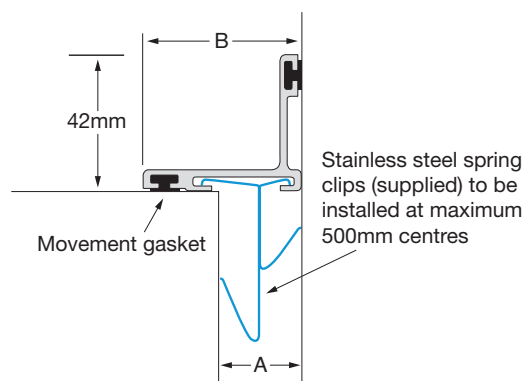

Further technical specifications and information – visit www.latham-australia.com

- ➔ PDF & DWG Details
- ➔ Architectural Specs
- ➔ Warranty Details
- ➔ Product Information
- ➔ Fire Rated Systems
- ➔ Working Video
- ➔ Joint Cover Specs
- ➔ Product Catalogue