

SAC Flat Wall Acoustic Aluminium Wall & Ceiling Expansion Joint Covers



Features



Multidirectional
2-way Movement



Indoor Use

Stainless steel spring clips
(supplied) to be installed
at maximum 500mm
centres



Ceiling Tee's by others

SAC Flat Series Acoustic wall and ceiling expansion joint covers are designed for use in masonry, timber, cement sheet, gyprock and other hard surfaced applications. Generally intended for internal use, although if no Latham wind or water barrier is required, they can be used in external applications. The covers are held in place by anti-tamper one direction stainless steel springs making the system very difficult to remove once installed. As standard, they are supplied in clear anodised finish for all exposed surfaces. On request they can be powder coated or anodised to other colours and textures, including woodgrain.

Materials

- Aluminium 6063-T5 alloy.
- Supplied in 3050mm lengths.
- Stainless steel spring clips.
- All visual surfaces come with a 20-micron clear anodised finish.
- Contact a Latham representative for alternative anodising or powder coating options.

Fixings

- The joint is held in position with tough stainless steel spring clips at ~500mm centres, which make the profiles virtually impossible to remove once installed.


TECHNICAL CHARACTERISTICS

Illustrated: 25SAC

Aluminium Code	A	B	Movement	Total Available Movement	Overall Depth
25SAC	25	66	+/-25mm	50mm	6mm
50SAC	50	116	+/-25mm	50mm	6mm

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Stainless steel spring clips (supplied) to be installed at maximum 500mm centres

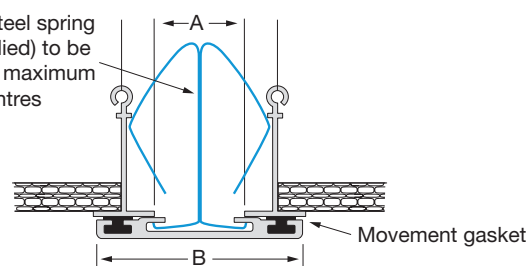

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue