


LATHAM NEOPRENE-X-PANSION TILE STRIPS

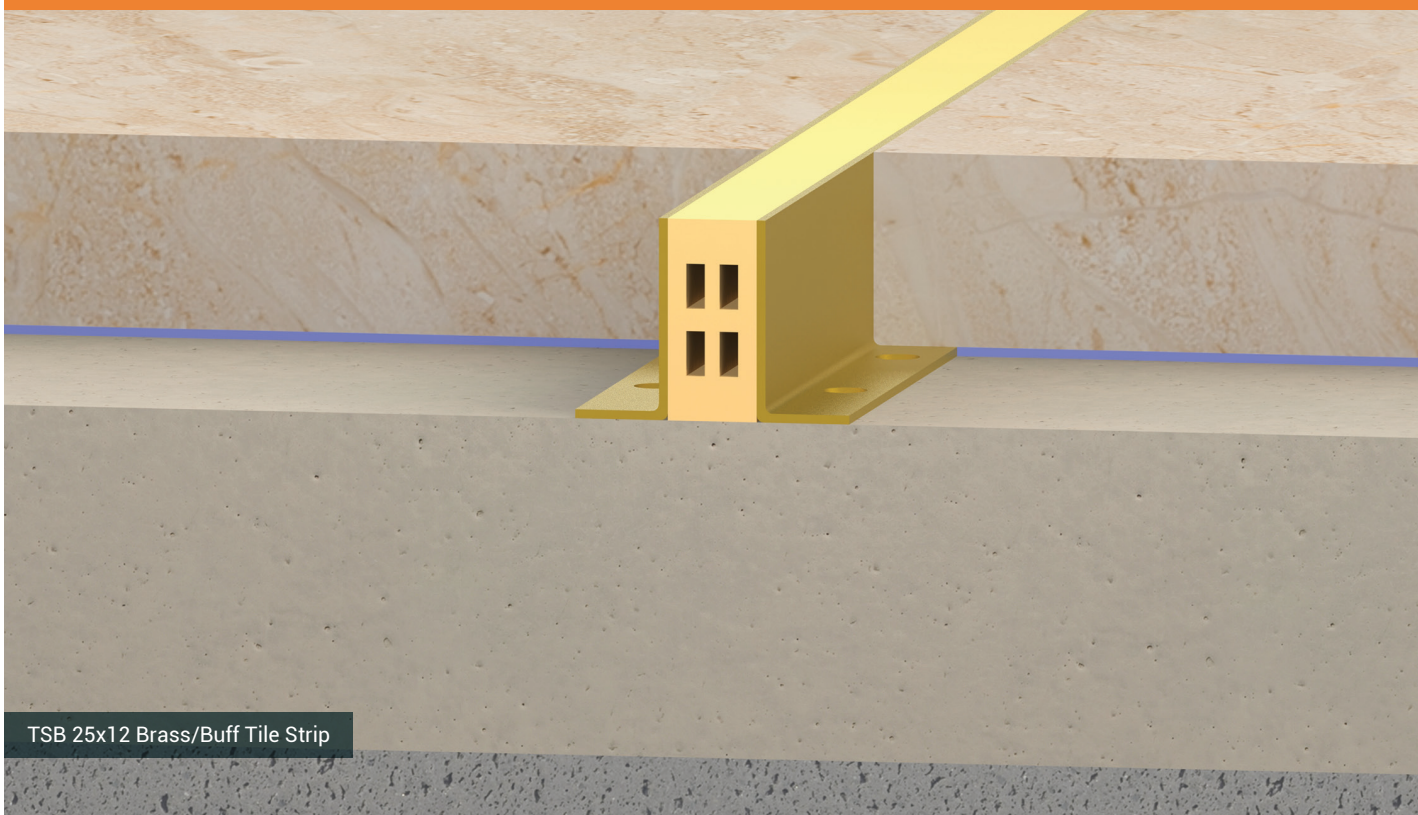

Tile Strips 12MM NEOPRENE INSERT

The tables and information on these pages indicate some of the available 12mm Tile Strip configurations. Illustrations show some of the colour combinations available for the neoprene inserts and the metal side plates.

Latham 12mm Neoprene-X-Pansion Tile Strips are generally used in exterior applications where the thermal expansion of floor finishes is greater than internal floor applications.

They are also suitable for internal applications as well and are sometimes considered when architects and clients want to extend the bay size and increase the distance between control strips (see pages 4-6 for further set out and spacing details).

Latham 12mm Neoprene-X-Pansion Tile Strips with extruded 1.5mm aluminium and brass, 1mm folded brass, 1.2mm folded aluminium and 0.7mm folded stainless steel side plates are intended to be used in all hard flooring applications and are designed to be installed in conjunction with tile adhesive (see detail on pages 16 and 52)


Latham 12mm Neoprene-X-Pansion Tile Strips are supplied in standard 1800mm lengths and should be installed so as to minimise the frequency of butt joints

and short lengths. Also 3-way and 4-way butt joint intersections should be avoided (see page 54 for further details).

Latham Neoprene-X-Pansion Tile Strips should be installed in all locations of stress concentration; at changes in direction; wherever localised movement is anticipated and around rigid and fixed large objects such as columns, stair and lift wells, light posts, across driveways, at access covers, across doorways and anywhere that may impede expansion and contraction of the floor finish. For further information and specification details available, see page 55 or for full details visits our website www.latham-australia.com



12MM NEOPRENE INSERT

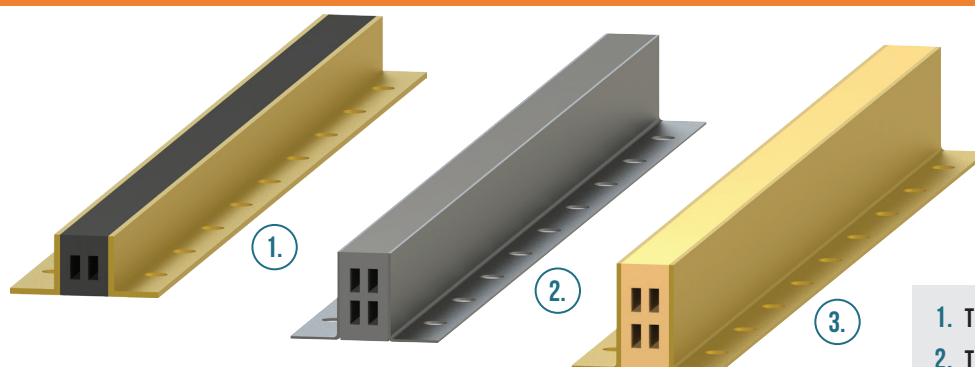

1. TSB 13X12 BRASS/BLACK
2. TSS 20X12 STAINLESS STEEL/GREY
3. TSB 25X12 BRASS/BUFF

GENERAL PRODUCT INFORMATION

- ▶ Supplied in standard lengths of 1800mm.
- ▶ Stock Tile Strips are unsuitable for grinding in place. For grinding in place specify Type G.I.P Strips (special manufacture).
- ▶ Product profile illustrations approximately 50% full size.

12MM WIDE ADHESIVE FIXED TILE STRIP PROFILE GUIDE

Specify Neoprene Colour

Brass (1.5mm thick side plates) * Denotes 1mm folded	Aluminium (1.5mm thick side plates) * Denotes 1.2mm folded	Stainless Steel (0.7mm thick side plates) Folded	Overall Product Depth	Accommodates Paving Maximum Thickness
TSB-4 x 12	N/A	N/A	6mm	4mm
TSB-8 x 12	TSA-8 x 12	TSS-8 x 12	10mm	8mm
TSB-10 x 12	TSA-10 x 12	TSS-10 x 12	12mm	10mm
TSB-13 x 12	TSA-13 x 12	TSS-13 x 12	15mm	13mm
TSB-16 x 12 *	TSA-16 x 12 *	TSS-16 x 12	18mm	16mm
TSB-18 x 12 *	TSA-18 x 12	TSS-18 x 12	20mm	18mm
TSB-20 x 12 *	TSA-20 x 12	TSS-20 x 12	22mm	20mm
TSB-23 x 12	TSA-23 x 12	TSS-23 x 12	25mm	23mm
TSB-25 x 12 *	TSA-25 x 12 *	TSS-25 x 12	27mm	25mm
TSB-30 x 12 *	TSA-30 x 12	TSS-30 x 12	32mm	30mm
TSB-35 x 12 *	TSA-35 x 12 *	TSS-35 x 12	37mm	35mm
TSB-40 x 12 *	TSA-40 x 12 *	TSS-40 x 12	42mm	40mm
TSB-45 x 12 *	TSA-45 x 12 *	TSS-45 x 12	47mm	45mm
TSB-50 x 12 *	TSA-50 x 6 *	TSS-50 x 12	52mm	50mm
TSB-60 x 12 *	TSA-60 x 6 *	TSS-60 x 12	62mm	60mm
TSB-70 x 12 *	TSA-70 x 6 *	TSS-70 x 12	72mm	70mm
TSB-75 x 12 *	TSA-75 x 12 *	TSS-75 x 12	77mm	75mm
TSB-80 x 12 *	TSA-80 x 12 *	TSS-80 x 12	82mm	80mm
TSB-90 x 12 *	TSA-90 x 12 *	TSS-90 x 12	92mm	90mm
TSB-100x 12 *	TSA-100x 12 *	TSS-100x 12	102mm	100mm
TSB-110 x 12 *	TSA-110 x 12 *	TSS-110 x 12	112mm	110mm
TSB-125 x 12 *	TSA-125 x 12 *	TSS-125 x 12	127mm	125mm

☛ Custom heights to accommodate custom floor finish thicknesses available on request.

☛ Some custom metal plate thicknesses available on request.

☛ Contact Latham Australia with your requirements.

NEOPRENE INFILL COLOUR OPTIONS

BU Buff **GR** Grey **BL** Black

METAL SIDE PLATE OPTIONS

BR Brass 1.5mm **AL** Aluminium 1.5mm **SS** Stainless Steel 0.7mm