


LATHAM NEOPRENE-X-PANSION TILE STRIPS

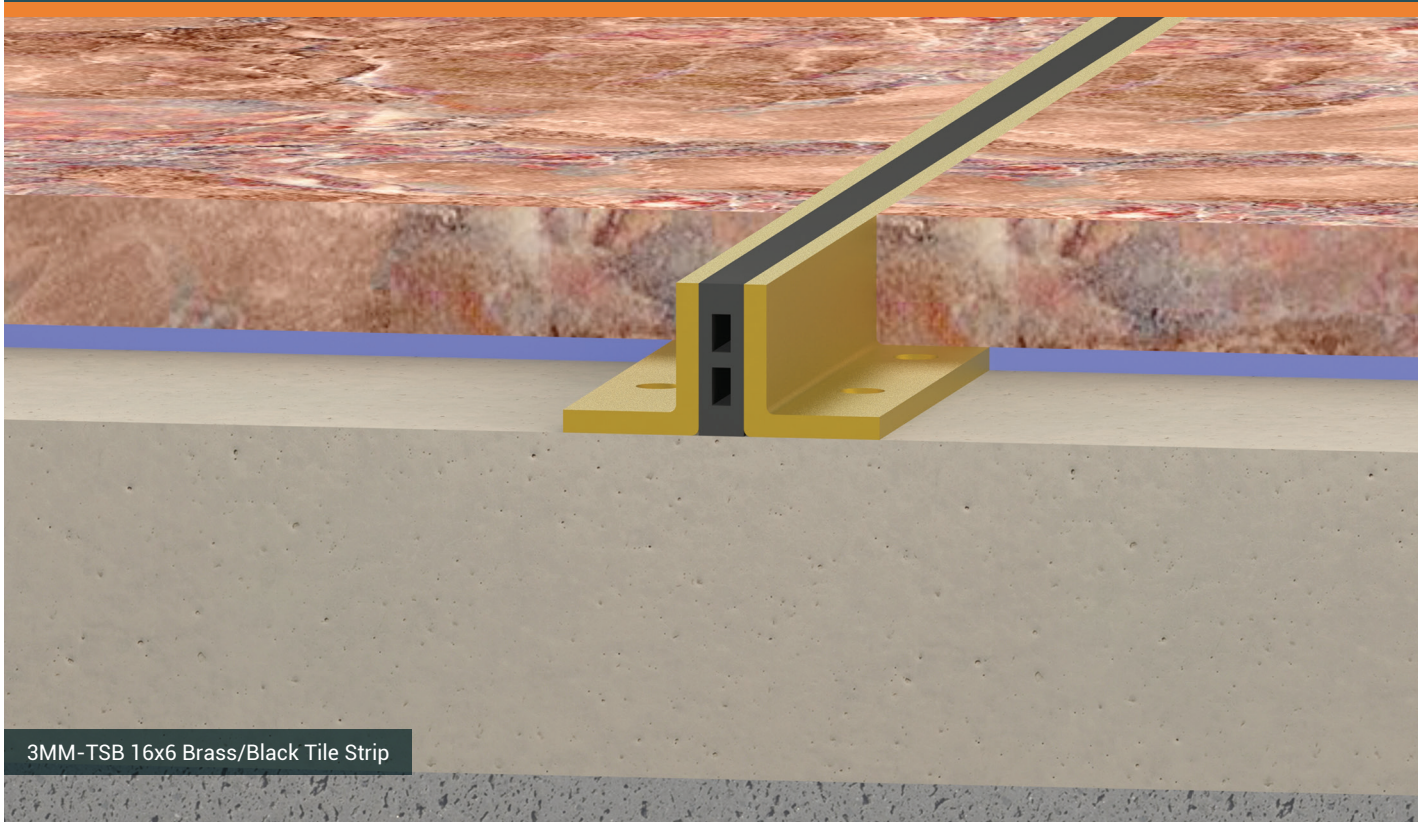

Tile Strips 6MM NEOPRENE INSERT WITH 3MM SIDE PLATES

The tables and information on these pages indicate some of the available 6mm Tile Strip configurations with 3mm thick brass and zinc side plates. Illustrations show some of the colour combinations available for the neoprene inserts and the 3mm metal side plates.

Latham 6mm Neoprene-X-Pansion Tile Strips, with 3mm side plates are generally used in interior applications where the expected thermal expansion of floor finish would be considered less than an external application.

They are also suitable for external applications as well, however the bay sizes or distance between the strips will need to be reduced (see pages 4-6 for further set out and spacing details).

Latham 6mm Neoprene-X-Pansion Tile Strips with 3mm side plates are intended to be used in all hard flooring applications and are designed to be installed in conjunction with tile adhesive (see detail on pages 16 and 20). Although the 3mm side plates are harder wearing than the standard 1mm brass and zinc side plates, a correctly installed Tile Strips installed flush


with the surrounding floor finish should not be impacted by loads and traffic.

Latham 6mm Neoprene-X-Pansion Tile Strips, with 3mm side plates are supplied in standard 1800mm lengths and should be installed so as to minimise the frequency of butt joints and short lengths. Also 3-way and 4-way butt joint intersections should be avoided (see page 54 for further details).

Latham Neoprene-X-Pansion Tile Strips should be installed in all locations of stress concentration; at changes in direction; wherever localised movement is anticipated and around rigid and fixed large objects such as columns, stair and lift wells, light posts, across driveways, at access covers, across doorways and anywhere that may impede expansion and contraction of the floor finish. For further information and specification details available, see page 55 or for full details visits our website www.latham-australia.com



6MM NEOPRENE INSERT – 3MM SIDE PLATES

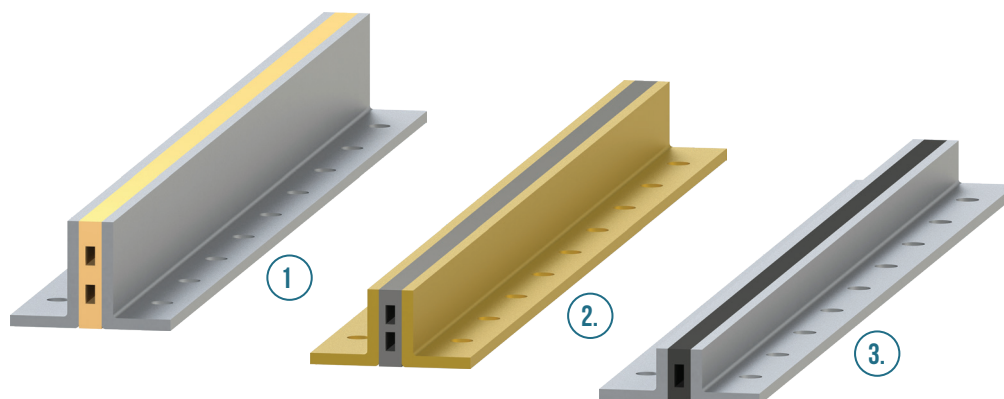

1. 3MM-TSA 25X6 ALUMINIUM/BUFF
2. 3MM-TSB 16X6 BRASS/GREY
3. 3MM-TSA 11X6 ALUMINIUM/BLACK

GENERAL PRODUCT INFORMATION

- ▶ Supplied in standard lengths of 1800mm.
- ▶ Stock Tile Strips are unsuitable for grinding in place. For grinding in place specify Type G.I.P Strips (special manufacture).
- ▶ Product profile illustrations approximately 50% full size.

6MM WIDE NEOPRENE-X-PANSION TILE STRIPS WITH 3MM THICK SIDE PLATES PROFILE GUIDE

Specify Neoprene Colour



Brass (3mm thick folded side plates)	Aluminium (3mm thick folded side plates)	Overall Product Depth	Accommodates Paving Maximum Thickness
3MM-TSB-8 x 6	3MM-TSA-8 x 6	12mm	8mm
3MM-TSB-11 x 6	3MM-TSA-11 x 6	15mm	11mm
3MM-TSB-14 x 6	3MM-TSA-14 x 6	18mm	14mm
3MM-TSB-16 x 6	3MM-TSA-16 x 6	20mm	16mm
3MM-TSB-18 x 6	3MM-TSA-18 x 6	22mm	18mm
3MM-TSB-21 x 6	3MM-TSA-21 x 6	25mm	21mm
3MM-TSB-25 x 6	3MM-TSA-25 x 6	27mm	23mm
3MM-TSB-30 x 6	3MM-TSA-30 x 6	32mm	28mm
3MM-TSB-35 x 6	3MM-TSA-35 x 6	37mm	33mm
3MM-TSB-40 x 6	3MM-TSA-40 x 6	42mm	38mm
3MM-TSB-45 x 6	3MM-TSA-45 x 6	47mm	43mm
3MM-TSB-50 x 6	3MM-TSA-50 x 6	52mm	48mm
3MM-TSB-60 x 6	3MM-TSA-60 x 6	62mm	58mm
3MM-TSB-70 x 6	3MM-TSA-70 x 6	72mm	68mm
3MM-TSB-75 x 6	3MM-TSA-75 x 6	77mm	73mm
3MM-TSB-80 x 6	3MM-TSA-80 x 6	82mm	78mm
3MM-TSB-90 x 6	3MM-TSA-90 x 6	92mm	88mm
3MM-TSB-100 x 6	3MM-TSA-100 x 6	102mm	98mm
3MM-TSB-110 x 6	3MM-TSA-110 x 6	112mm	108mm
3MM-TSB-125 x 6	3MM-TSB-125 x 6	127mm	123mm

☛ Custom heights to accommodate custom floor finish thicknesses available on request.

☛ Some custom metal plate thicknesses available on request.

☛ Contact Latham Australia with your requirements.

- FORM ✓
- FUNCTION ✓
- SAFETY ✓
- SUSTAINABILITY ✓
- QUALITY ✓
- COMMERCIALITY ✓
- INNOVATION ✓

NEOPRENE INFILL COLOUR OPTIONS

BU Buff

GR Grey

BL Black

METAL SIDE PLATE OPTIONS

BR Brass
3mm

AL Aluminium
3mm