



Interior and Exterior Application

Latham Asbraloy Recess Mounted Safety Stair Tread Nosings are designed for new and existing applications where pedestrian safety, stair appearance and stair longevity are of particular concern.

The treads can be recessed into new work or recessed into existing floor finishes. All S Series Recess Mounted Safety Stair Tread Nosings are suitable for internal or external applications and are available with a wide range of insert colours (see pages 06 to 07).

Lengths

All Asbraloy and Asbrabronz profiles are offered factory cut to the site required length (up to 4600mm in 1 continuous length) complete with countersunk holes, stainless steel or brass screws (depending on the selected section) and plastic plugs. If specified at time of order treads can be supplied in full manufacturing lengths of 4600mm for on site cutting and drilling to suit clients supplied fixings.

All Asbraloy and Asbrabronz Safety Stair Tread Nosings are discreetly stamped on the surface close to one end as manufactured by "Latham Australia Sydney", which ensures installed material can be identified in the future and is the clients confirmation that the specified product has been installed.

Factory Cutting Tolerance: +0/-3mm.

Screw Fixing Holes

Unless otherwise specified at time of order, holes will be provided in the treads to suit 8 gauge stainless steel or brass screws (details under Accessories-Fixing page 04) at Latham's standard 250mm centres. Any special machining, mitering, modifications or alternative hole locations will be carried out at extra cost.

Finishes

Asbraloy Aluminium profiles are supplied in mill finish. On request profiles can be supplied with a polished bullnose or in clear anodized finish at additional cost. In marine type applications Asbraloy profiles should be specified with 20 micron clear anodised finish.

Customers with special applications or requirements are invited to discuss them with us. Call for detailed information before specifying and ordering. Service factors must be taken into consideration when selecting stair tread profile.



Designs and specifications subject to change without notice.



Interior and Exterior Application

1



Asbraloy ACS-20
aluminium clad bar
(sparkling black-
standard infill)

2



Asbraloy ACS-50 aluminium clad bar
(sparkling black-standard infill)

3



Asbraloy 322S (buff)

4



Asbraloy 493S (blue grey)

5



Asbraloy 735S (blue)

6



Asbraloy 745S (terracotta)

ILLUSTRATIONS
(approximate scale)
FULL SIZE

8



Asbraloy 765S (silver grey)

7








Asbraloy 755S (sparkling black-standard infill)

Slip Resistance Performance Testing for Asbraloy and Asbrabronz profiles can found on pages 76 to 77 of this catalogue. All measurements in millimetres.

Index	Product No.	Metal Type	A	B	C	D	Drilling Location
1	ACS-20	Aluminium	20	–	10	20	1
2	ACS-50	Aluminium	50	–	10	50	1
3	322S	Aluminium	33	–	5	33	1+2
4	493S	Aluminium	50	–	5	50	2
5	735S	Aluminium	72	50	5	75	4
6	745S	Aluminium	73	37	5	75	4
7	755S	Aluminium	75	37	5	80	4
8	765S	Aluminium	69	12	5	75	4

Measurements indicated are indicative only. If a precise recess is being cut use the material for a template or request a sample.

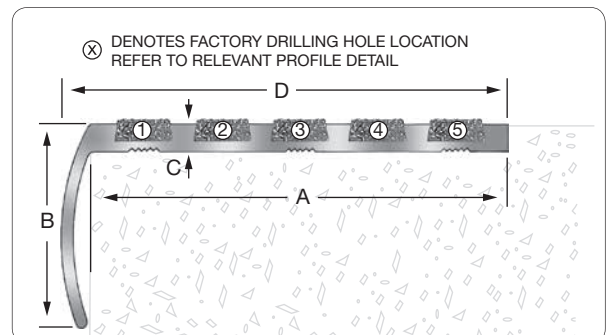

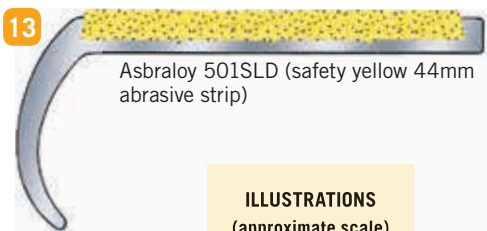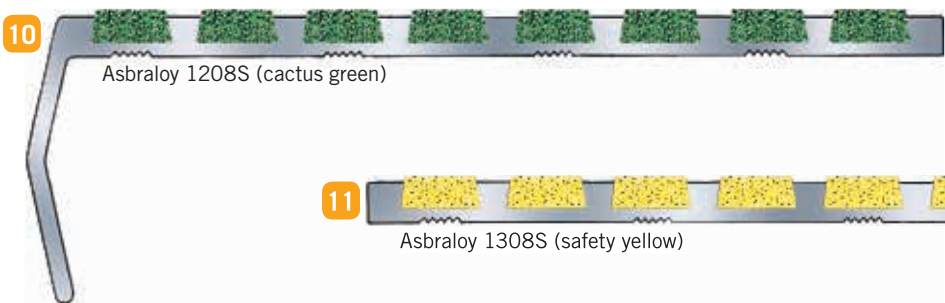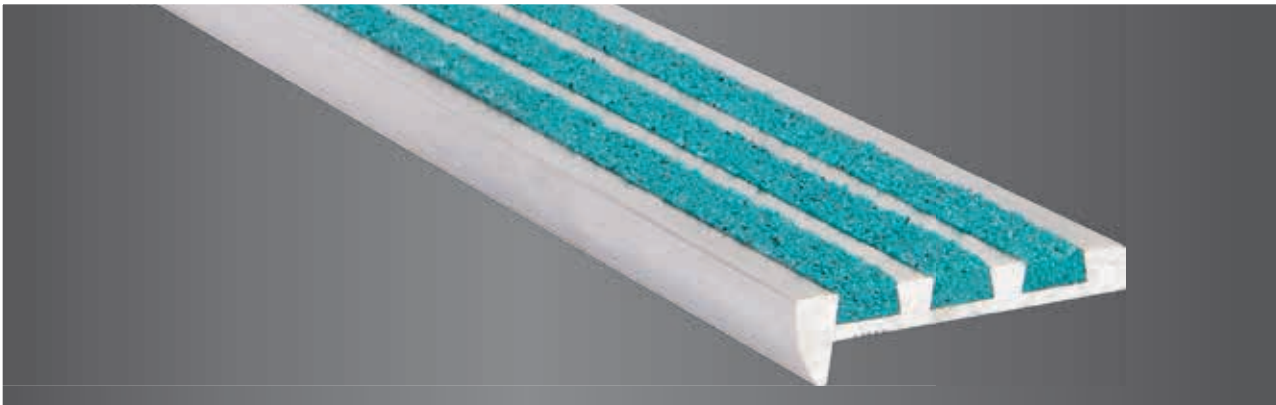


ILLUSTRATIONS
(approximate scale)
FULL SIZE

Slip Resistance Performance Testing for Asbraloy and Asbrabronz profiles can be found on pages 76 to 77 of this catalogue. All measurements in millimetres.

Index	Product No.	Metal Type	A	B	C	D	Drilling Location
9	775S	Aluminium	72	10	5	75	4
10	1208S	Aluminium	116	37	5	120	3+7
11	1308S	Aluminium	117	-	5	117	2+7
12	FA501S	Aluminium	56	10	5	59	1
13	501SLD	Aluminium	50	25	4	55	1
14	513SHD	Aluminium	45	12	6	50	3

Measurements indicated are indicative only. If a precise recess is being cut use the material for a template or request a sample.

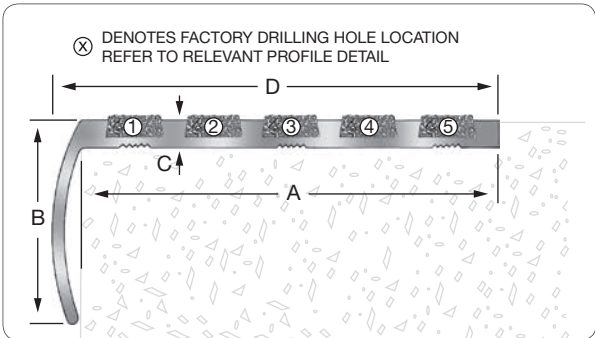

Designs and specifications subject to change without notice.



Interior and Exterior Application - Super Visual Range

15




Asbraloy AB-735S (all black)

16



Asbraloy AW-735S (all white)

17

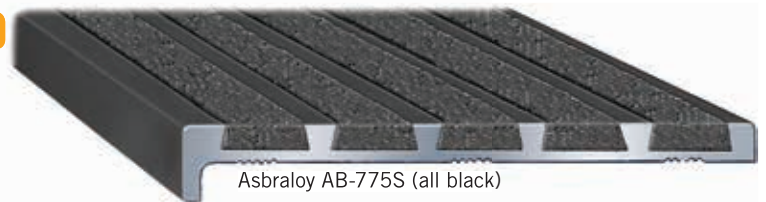


Asbraloy AB-775S (all black)

18




Asbraloy AW-775S (all white)

19

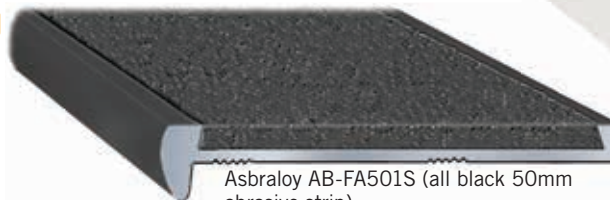

Asbraloy AB-FA501S (all black 50mm abrasive strip)

20

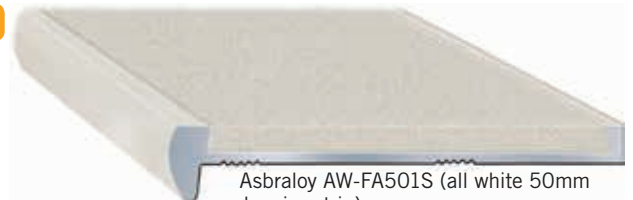

Asbraloy AW-FA501S (all white 50mm abrasive strip)

21



Asbraloy AB-493S (all black)

22



Asbraloy AW-493S (all white)



Customers with special applications or requirements are invited to discuss them with us. Call for detailed information before specifying and ordering. Service factors must be taken into consideration when selecting stair tread profile.

Index	Product No.	Metal Type	A	B	C	D	Drilling Location
15	AB-735S	Aluminium	72	50	5	75	4
16	AW-735S	Aluminium	72	50	5	75	4
17	AB-775S	Aluminium	72	10	5	75	4
18	AW-775S	Aluminium	72	10	5	75	4
19	AB-FA501S	Aluminium	56	10	5	59	1
20	AW-FA501S	Aluminium	56	10	5	59	1
21	AB-493S	Aluminium	50	0	5	50	2
22	AW-493S	Aluminium	50	0	5	50	2

Measurements indicated are indicative only. If a precise recess is being cut use the material for a template or request a sample.

