
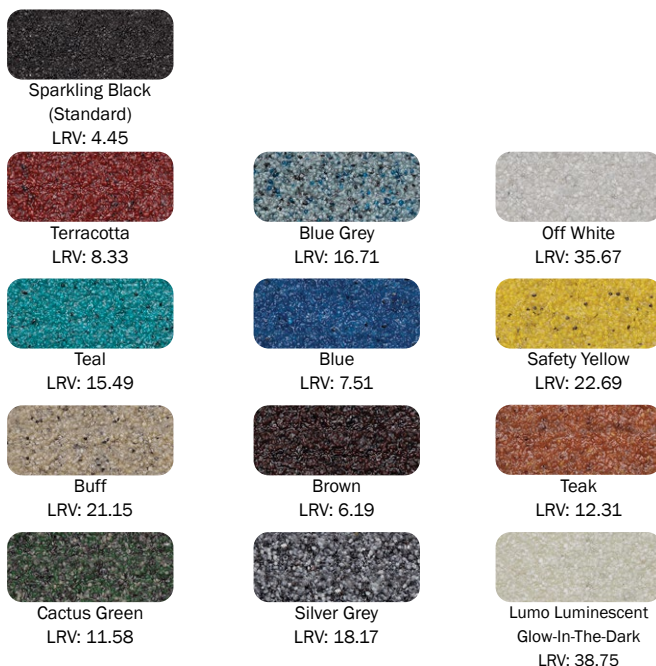


Latham SK, SHD & WAK-Wing Cast-In Place Safety Stair Tread Nosings Data Sheet

TYPE-FA501SWAK

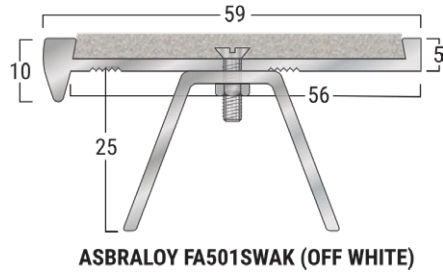

PRODUCT DETAILS - FA501SWAK

Latham Asbraloy SK, SHD and WAK-Wing Cast-In Place Safety Stair Nosings are designed for new applications where pedestrian safety and stair longevity is of particular concern. The systems can be installed into the wet concrete topping. All SK, SHD and WAK-Wing Series Cast-In Place Safety Stair Nosings are suitable for internal or external applications and are available with a wide range of insert colours.

FEATURES

- P5 Slip Classification
- Super hard wearing.
- Full Abrasive Silicon Carbide Mineral Insert.
- 13 insert colours available
- Luminance Reflective Value (LRV)
- UV Stable

MATERIALS

Standard Supply: Cut to site required lengths, or in full 4600mm lengths

Aluminium: 6063-T5, ASTM B221, Mill Finish

Inserts: Suregrip™ Sparkling Black (standard) Silicon Carbide Mineral Inserts, or Supagrit™ Coloured Silicon Carbide Mineral Inserts

COMPLIANCE

- **Wet Slip Test:** Mean British Pendulum (SRV) Classification - **P5**
- **Oil Wet Ramp Test:** Slip Resistant Acceptance Group - **R12**
- Tested to Australian Standard ISO 9239 Reaction to Fire Test for Flooring.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Stair Tread Installation Instructions](#)
- [Luminance Contrast Information](#)
- [Slip Resistant Testing Information](#)
- [Code Compliance Information](#)
- [Colour Range Information](#)
- [Fire Test Information](#)
- [Adhesive Technical Data Sheet](#)
- [Full Product Catalogue](#)
- [Maintenance Guide](#)
- [Photo Gallery](#)
- [Accessories Guide](#)
- [Warranty](#)