


Latham Asbrabronz™ Brass Recess Mounted Safety Stair Tread Nosing Data Sheet

TYPE-B805S



△ - Denotes Factory Drilling Location
When Specified

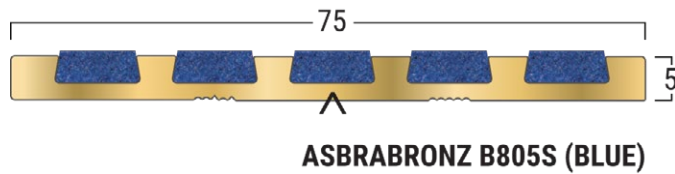

Terracotta LRV: 20.92	Blue Grey LRV: 26.44	Off White LRV: 37.67
Teal LRV: 25.86	Blue LRV: 21.56	Safety Yellow LRV: 30.57
Buff LRV: 27.52	Sparkling Black LRV: 18.66	Teak LRV: 24.18
Cactus Green LRV: 24.02	Silver Grey LRV: 27.25	Lumo Luminescent Glow-In-The-Dark LRV: 40.82

PRODUCT DETAILS - B805S

Latham safety inserts provide slip resistant protection for pedestrians, building occupants and owners. Safety stair inserts highlight the leading edge of the step, or make ramps or flat surfaces safe. These metal supported products are recommended for installation in rebated or preformed grooves in granite, marble, terrazzo, concrete and timber treads.

FEATURES

- P5 Slip Classification
- Super hard wearing.
- Abrasive Silicon Carbide Mineral Insert.
- 13 insert colours available
- Luminance Reflective Value (LRV)
- Available factory curved
- UV Stable

MATERIALS

Standard Supply: Cut to site required lengths, complete with countersunk holes, stainless steel screws and plastic plugs, or in full 4600mm lengths
Brass: Alloy 380 UNS - C38010, Mill Finish
Inserts: Supagrit™ (Standard - Brown) Silicon Carbide Mineral Inserts.

COMPLIANCE

- NCC compliant
- AS 1428.1-2009 compliant
- **Wet Slip Test:** Mean British Pendulum (SRV) Classification - **P5**
- **Oil Wet Ramp Test:** Slip Resistant Acceptance Group - **R12**
- Tested to Australian Standard ISO 9239 Reaction to Fire Test for Flooring.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Stair Tread Installation Instructions](#)
- [Luminance Contrast Information](#)
- [Slip Resistant Testing Information](#)
- [Code Compliance Information](#)
- [Colour Range Information](#)
- [Fire Test Information](#)
- [Adhesive Technical Data Sheet](#)
- [Full Product Catalogue](#)
- [Maintenance Guide](#)
- [Photo Gallery](#)
- [Accessories Guide](#)
- [Warranty](#)