


# NEOPRENE STRESS RELIEVING CONTROL STRIPS

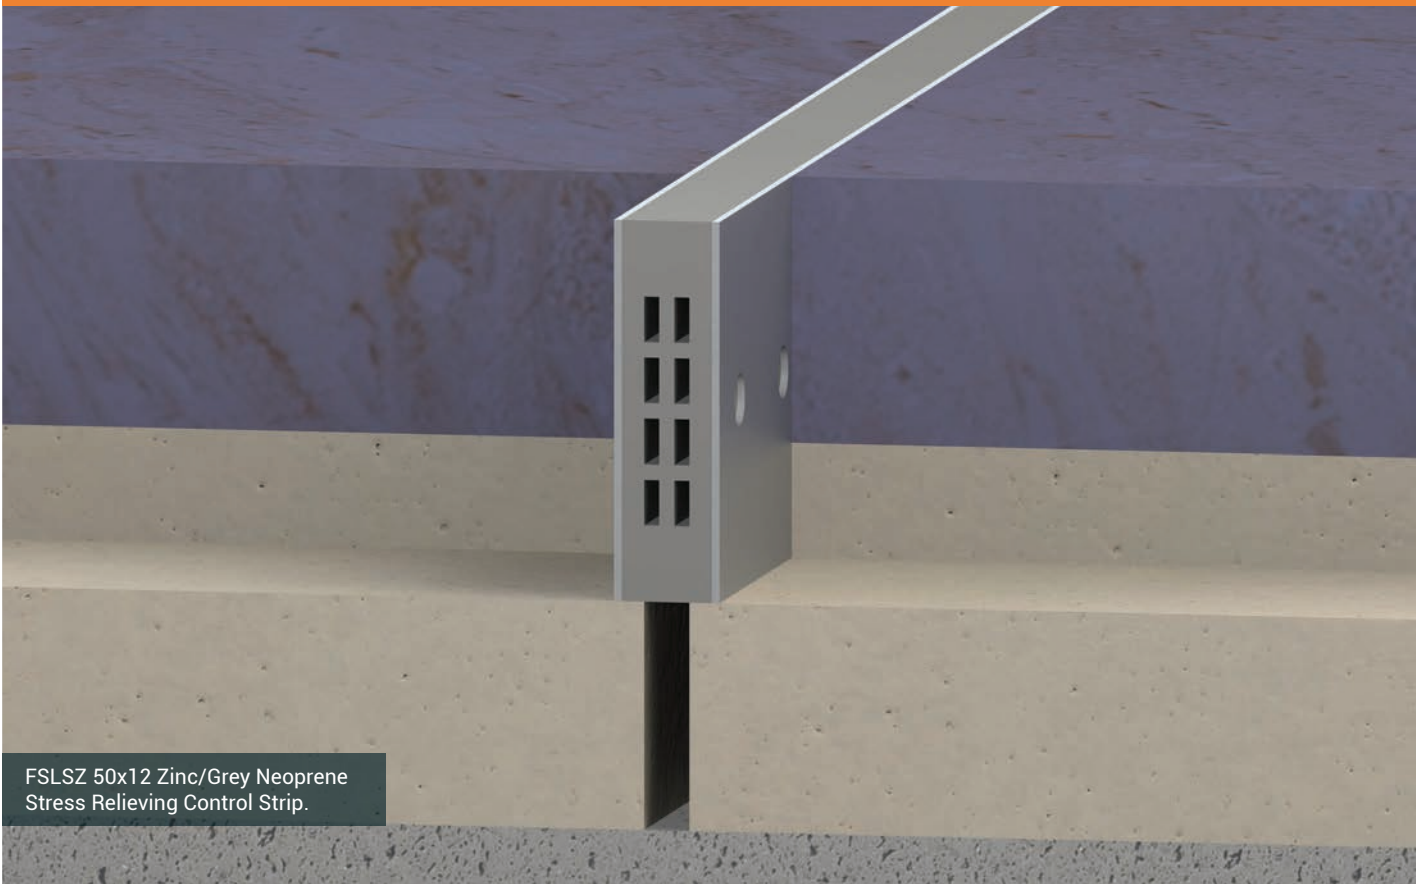

FSLSZ 50x12 Zinc/Grey Neoprene Stress Relieving Control Strip.

## Neoprene Stress Relieving Control Strips 12MM NEOPRENE INSERT

**Latham Neoprene Stress Relieving Control Strips with 12mm neoprene inserts and 1mm Brass or Zinc and 0.7mm Stainless Steel side plates are designed to be used in applications where Latham Neoprene-X-Pansion Loc® or Tile Strips have been overlooked during the installation of the flooring.**

These Stress Relieving Control Strips with 12mm neoprene inserts and 1mm Brass or Zinc and 0.7mm stainless steel are designed to be saw cut into the finished floor, to help control expansion in the flooring surface, by relieving stress that can build up when flooring is installed without the use of control joints. Over stressed floor finishes may crack or lift.





Latham Neoprene Stress Relieving Control Strips with 12mm neoprene inserts and 1mm Brass or Zinc and 0.7mm Stainless Steel side plates are generally considered for exterior applications where the thermal expansion of floor finishes is greater than internal floor applications. They are also suitable for internal applications as well and are sometimes considered when architects and clients want to extend the bay size and increase the distance between control strips (see pages 4-6 for further set out and spacing details).

Latham Neoprene Stress Relieving Control Strips with 12mm neoprene inserts and 1mm Brass or Zinc and 0.7mm Stainless Steel side plates are supplied in standard 1800mm lengths and should be installed so as to minimise the frequency of butt joints and short lengths. Also 3-way and 4-way butt joint intersections should be avoided (see page 54 for further details).

Latham Neoprene Stress Relieving Control Strips should be installed in all locations of stress concentration; at changes in direction; wherever localised movement is anticipated and around rigid and fixed large objects such as columns, stair and lift wells, light posts, across driveways, at access covers, across doorways and anywhere that may impede expansion and contraction of the floor finish.

For further information and specification details available, see page 55 or for full details visit our website [www.latham-australia.com](http://www.latham-australia.com).

# 12MM NEOPRENE INSERT

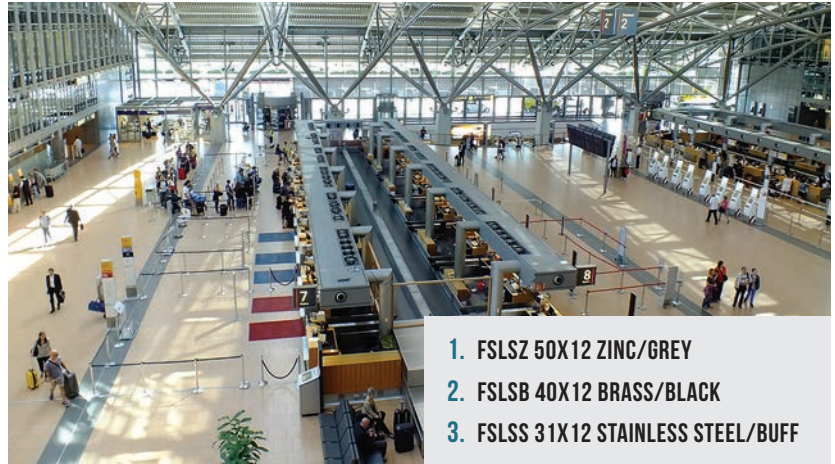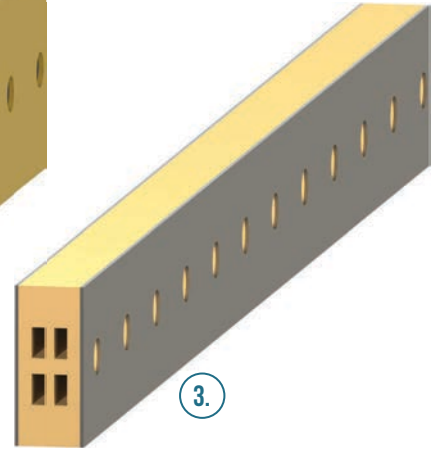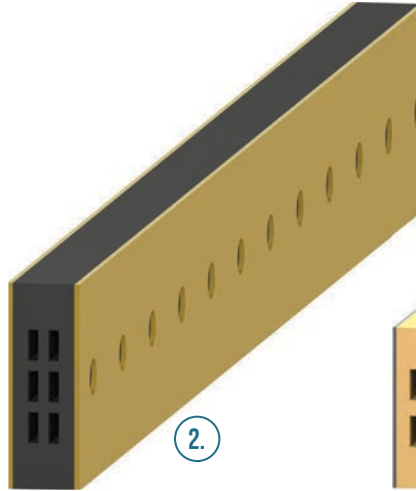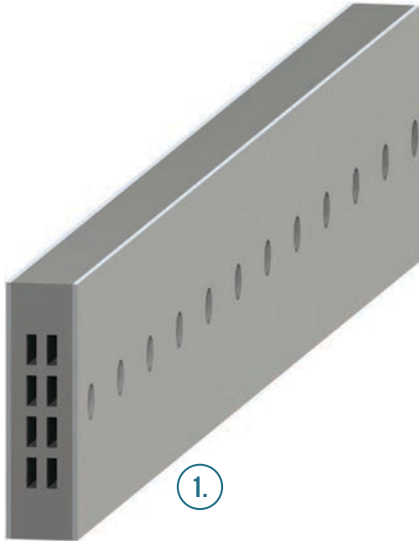

1. FLSZ 50X12 ZINC/GREY
2. FLSB 40X12 BRASS/BLACK
3. FLS 31X12 STAINLESS STEEL/BUF



## GENERAL PRODUCT INFORMATION

- ▶ Supplied in standard lengths of 1800mm.
- ▶ Latham Neoprene Stress Relieving Control Strips are designed to be used in applications where Latham Neoprene-X-Pansion Loc® or Tile Strips have been overlooked when the floor finish is installed.
- ▶ Product profile illustrations approximately 66% full size.

## 12MM WIDE NEOPRENE STRESS RELIEVING CONTROL STRIPS PROFILE GUIDE

Specify Neoprene Colour

Brass (1mm thick side plates)	Zinc (1mm thick side plates)	Stainless Steel (0.7mm thick side plates)	Metal Side Plate Depth
FLSB- 22 x 12	FLSZ-22 x 12	FSLSS-22 x 12	22mm
FLSB- 31 x 12	FLSZ-31 x 12	FSLSS-31 x 12	31mm
FLSB- 40 x 12	FLSZ-40 x 12	FSLSS-40 x 12	40mm
FLSB- 50 x 12	FLSZ-50 x 12	FSLSS-50 x 12	50mm
FLSB- 65 x 12	FLSZ-65 x 12	FSLSS-65 x 12	65mm

- ☛ Custom heights to accommodate custom floor finish thicknesses available on request.
- ☛ Some custom metal plate thicknesses available on request.

- FORM ✓
- FUNCTION ✓
- SAFETY ✓
- SUSTAINABILITY ✓
- QUALITY ✓
- COMMERCIALITY ✓
- INNOVATION ✓

### NEOPRENE INFILL COLOUR OPTIONS

**BU** Buff    **GR** Grey    **BL** Black

### METAL SIDE PLATE OPTIONS

**BR** Brass 1mm    **ZN** Zinc 1mm    **SS** Stainless Steel 0.7mm