


NEOPRENE STRESS RELIEVING CONTROL STRIPS

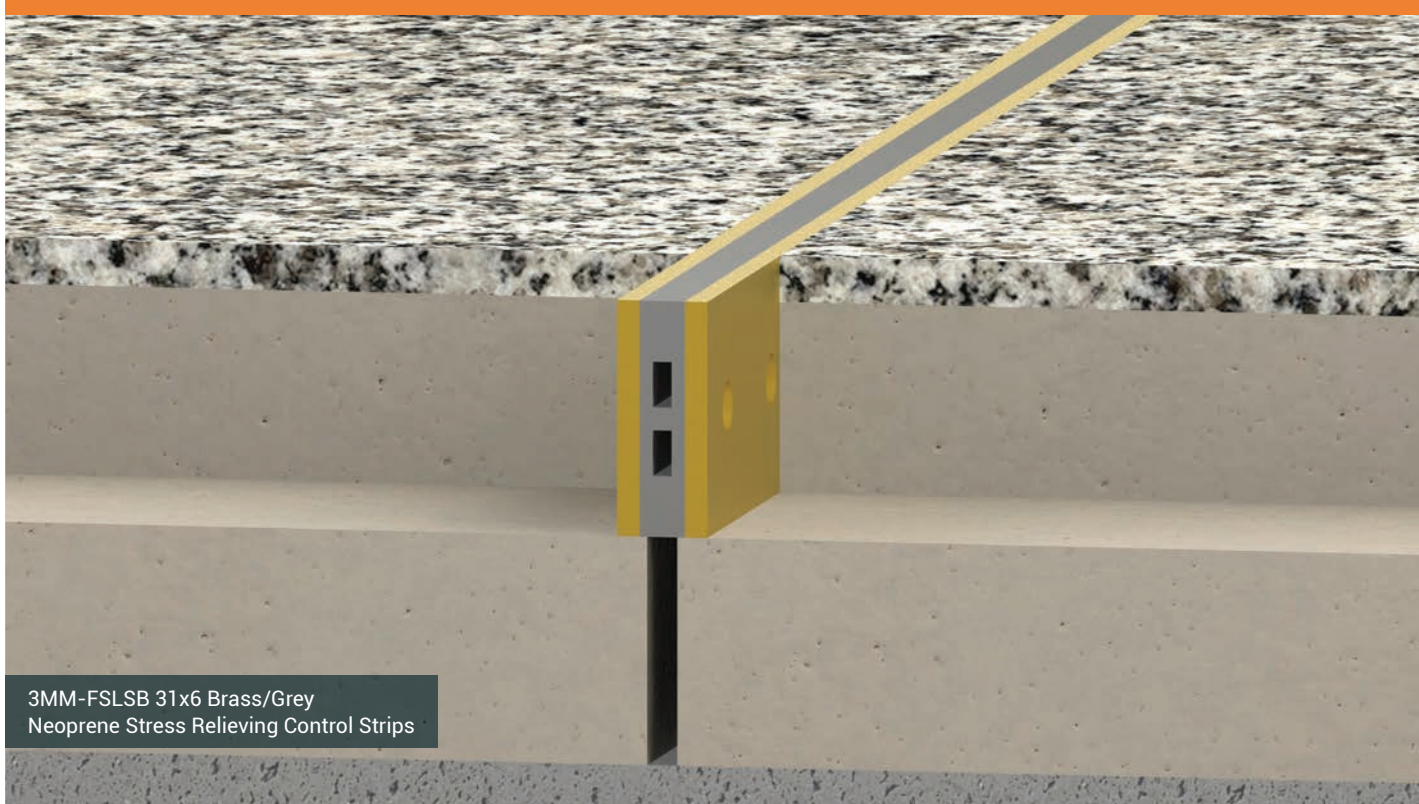

Neoprene Stress Relieving Control Strips

6MM NEOPRENE INSERT WITH 3MM SIDE PLATES

Latham Neoprene Stress Relieving Control Strips with 6mm neoprene inserts and 3mm Brass or Zinc side plates are designed to be used in applications where Latham Neoprene-X-Pansion Loc® or Tile Strips have been overlooked during the installation of the flooring.

These Stress Relieving Control Strips with 6mm neoprene inserts and 3mm Brass or Zinc side plates are designed to be saw cut into the finished floor, to help control expansion in the flooring surface, by relieving stress that can build up when flooring is installed without the use of control joints. Over stress floor finishes may crack or lift.



Latham Neoprene Stress Relieving Control Strips with 6mm neoprene inserts and 3mm Brass or Zinc side plates are generally used in interior applications where the expected thermal expansion of floor finish would be considered less than an external application. They are also suitable for external applications as well, however the bay sizes or distance between the strips will need to be reduced (see page 4-6 for further set out and spacing details).

Latham Neoprene Stress Relieving Control Strips with 6mm neoprene inserts and 3mm Brass or Zinc side plates are supplied in standard 1800mm lengths and should be installed so as to minimise the frequency of butt joints and short lengths. Also 3-way and 4-way butt joint intersections should be avoided (see page 54 for further details).

Latham Neoprene Stress Relieving Control Strips should be installed in all locations of stress concentration; at changes in direction; wherever localised movement is anticipated and around rigid and fixed large objects such as columns, stair and lift wells, light posts, across driveways, at access covers, across doorways and anywhere that may impede expansion and contraction of the floor finish.

Further information and specification details available see page 55 or for full details visits our website www.latham-australia.com.

6MM NEOPRENE INSERT-3MM SIDE PLATES

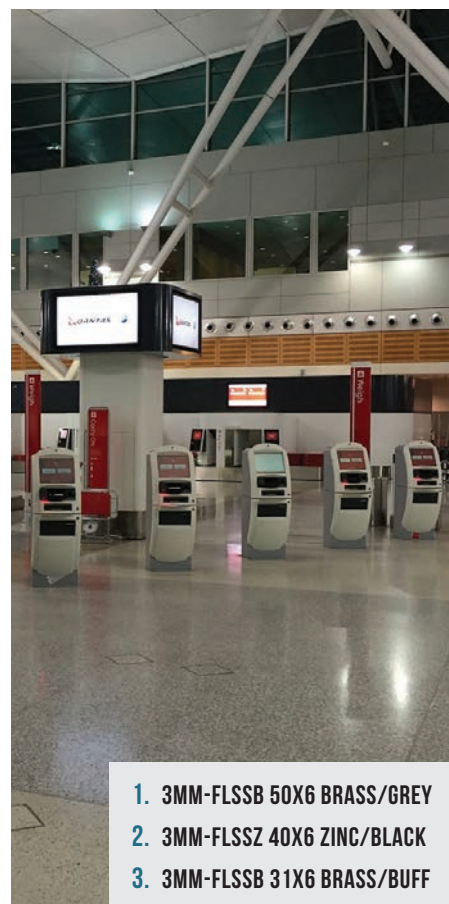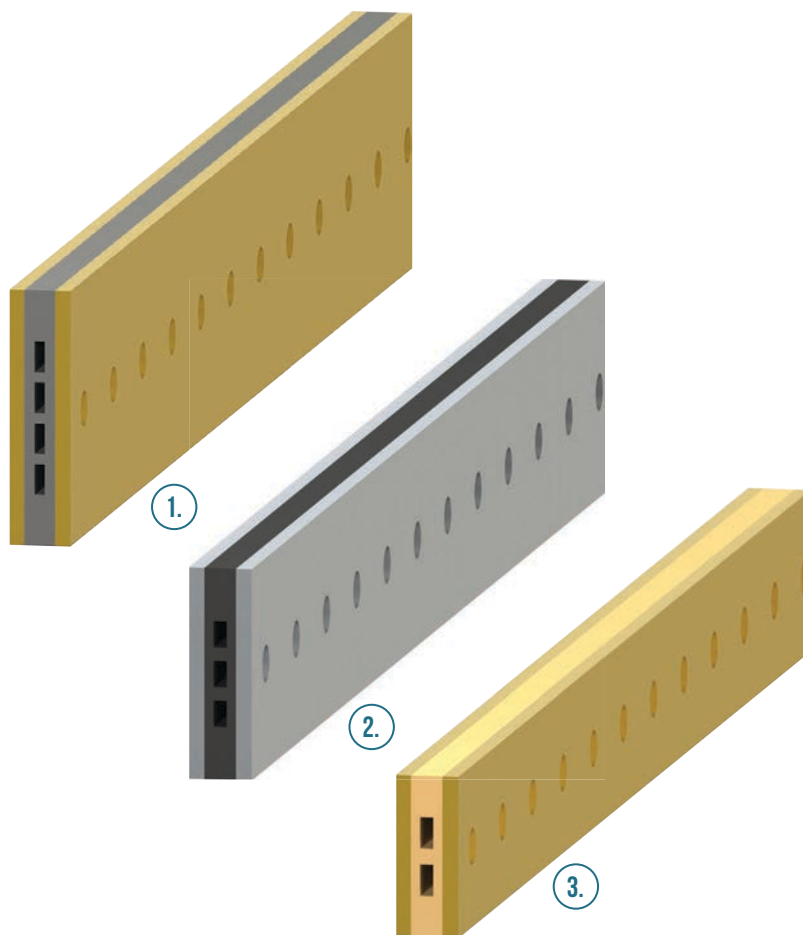

1. 3MM-FLSSB 50X6 BRASS/GREY
2. 3MM-FLSSZ 40X6 ZINC/BLACK
3. 3MM-FLSSB 31X6 BRASS/BUFF

GENERAL PRODUCT INFORMATION

- Supplied in standard lengths of 1800mm.
- Latham Neoprene Stress Relieving Control Strips are designed to be used in applications where Latham Neoprene-X-Pansion Loc® or Tile Strips have been overlooked when the floor finish is installed.
- Product profile illustrations approximately 66% full size.

6MM WIDE NEOPRENE STRESS RELIEVING CONTROL STRIPS WITH 3MM SIDE PLATES PROFILE GUIDE

Specify Neoprene Colour

| Brass (1mm thick side plates) | Zinc (1mm thick side plates) | Metal Side Plate Depth |
|----------------------------------|---------------------------------|---------------------------|
| 3MM-FSLSB- 22 x 6 | 3MM-FSLSZ-22 x 6 | 22mm |
| 3MM-FSLSB- 31 x 6 | 3MM-FSLSZ-31 x 6 | 31mm |
| 3MM-FSLSB- 40 x 6 | 3MM-FSLSZ-40 x 6 | 40mm |
| 3MM-FSLSB- 50 x 6 | 3MM-FSLSZ-50 x 6 | 50mm |
| 3MM-FSLSB- 65 x 6 | 3MM-FSLSZ-65 x 6 | 65mm |

☛ Custom heights to accommodate custom floor finish thicknesses available on request.
☛ Contact Latham Australia with your requirements.



- FORM ✓
- FUNCTION ✓
- SAFETY ✓
- SUSTAINABILITY ✓
- QUALITY ✓
- COMMERCIALITY ✓
- INNOVATION ✓

NEOPRENE INFILL COLOUR OPTIONS

BU Buff **GR** Grey **BL** Black

METAL SIDE PLATE OPTIONS

BR Brass 3mm **ZN** Zinc 3mm