


Latham Asbraloy™ Aluminium SB Bevelled Edge Safety Stair Tread Nosing Data Sheet

TYPE-755SB



▲ - Denotes Factory Drilling Location

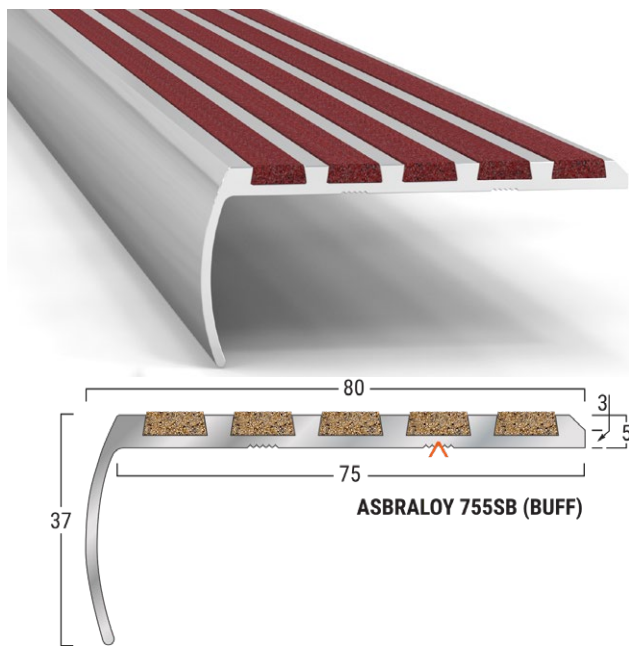

Sparkling Black (Standard) LRV: 28.9		
Smoke LRV: 41.58	Plum LRV: 40.62	Cactus Green LRV: 36.16
Terracotta LRV: 34.18	Blue Grey LRV: 37.11	Off White LRV: 50.17
Teal LRV: 31.19	Teak LRV: 35.75	Safety Yellow LRV: 41.14
Buff LRV: 40.81	Brown LRV: 32.75	Rose LRV: 47.10
Blue LRV: 32.01	Silver Grey LRV: 37.70	Lumo Luminescent Glow-In-The-Dark LRV: 51.62

PRODUCT DETAILS - 755SB

Bevelled edge stair tread nosings are designed for new applications where pedestrian safety, stair tread appearance and longevity is of particular concern. They are suitable for both internal and external applications and are designed for installation with carpet or vinyl applications.

FEATURES

- P5 Slip Classification.
- Super hard wearing.
- Abrasive Silicon Carbide Mineral Insert.
- 16 insert colours available.
- Luminance Reflective Value (LRV).
- UV Stable.

MATERIALS

Standard Supply: Cut to site required lengths, complete with countersunk holes, stainless steel screws and plastic plugs, or in full 4600mm lengths.
Aluminium: 6063-T5, ASTM B221, Mill Finish.
Inserts: Suregrip™ Sparkling Black (standard) Silicon Carbide Mineral Inserts, or Supagrit™ Coloured Silicon Carbide Mineral Inserts.

COMPLIANCE

- AS 1428.2-1992 compliant.
- **Wet Slip Test:** Mean British Pendulum (SRV) Classification - **P5**
- **Oil Wet Ramp Test:** Slip Resistant Acceptance Group - **R12**
- Tested to Australian Standard ISO 9239 Reaction to Fire Test for Flooring.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Stair Tread Installation Instructions](#)
- [Luminance Contrast Information](#)
- [Slip Resistant Testing Information](#)
- [Code Compliance Information](#)
- [Colour Range Information](#)
- [Fire Test Information](#)
- [Adhesive Technical Data Sheet](#)
- [Full Product Catalogue](#)
- [Maintenance Guide](#)
- [Photo Gallery](#)
- [Accessories Guide](#)
- [Warranty](#)