
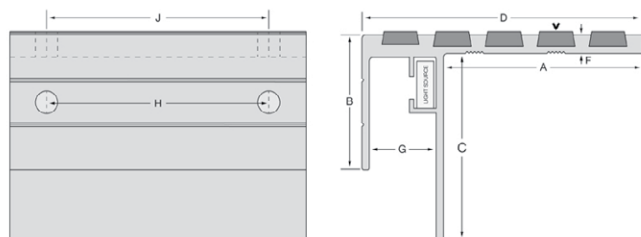



Latham Tredlite 2 Asbraloy™ LED Decorative Safety Stair Tread Nosing Data Sheet

TYPE-TOPDEC-745S

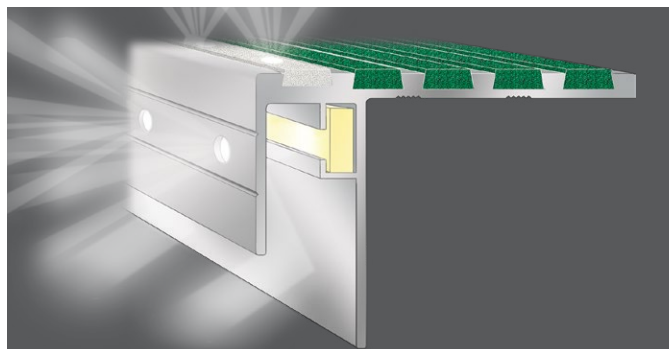


'V' Denotes Factory Drilling Location


A	B	C	D	F	G	H	J
53	37	50	75	5	18	66	66




Warm White LED Inserts
(Standard Colour)




Red LED Inserts




Bright White LED Inserts




Green LED Inserts



Blue LED Inserts



Yellow LED Inserts



Sparkling Black
(Standard)
LRV: 28.9




Plum
LRV: 40.62



Cactus Green
LRV: 36.16



Smoke
LRV: 41.58



Blue Grey
LRV: 37.11



Off White
LRV: 50.17




Terracotta
LRV: 34.18



Teak
LRV: 35.75




Safety Yellow
LRV: 41.14



Teal
LRV: 31.19



Brown
LRV: 32.75



Rose
LRV: 47.10



Buff
LRV: 40.81



Silver Grey
LRV: 37.70



Lumo Luminescent
Glow-In-The-Dark
LRV: 51.62




Blue
LRV: 32.01




Plum
LRV: 40.62




Cactus Green
LRV: 36.16



Smoke
LRV: 41.58



Blue Grey
LRV: 37.11




Off White
LRV: 50.17




Terracotta
LRV: 34.18




Teak
LRV: 35.75




Safety Yellow
LRV: 41.14



Teal
LRV: 31.19



Brown
LRV: 32.75



Rose
LRV: 47.10



Buff
LRV: 40.81



Silver Grey
LRV: 37.70



Lumo Luminescent
Glow-In-The-Dark
LRV: 51.62

PRODUCT DETAILS - TOPDEC-745S

Latham Tredlite Illuminated Slip Resistant Safety Stair Tread Nosings feature the newest safe low voltage 24V LED lighting technology, which is cheap and efficient to run. For most applications all necessary hardware is supplied, including transformers which will simply plug into a power point.

For the ultimate in lighting affect the (TOP) and (DEC) features have been combined in the (TOPDEC) version, this triple effect system offers the first slip resistant bar in off white colour, designed to emit a low glow lamp effect as well as a fan light effect combined with holes in the bullnose of the nosing to create line of light for a powerful visual effect.

FEATURES

- P5 Slip Classification
- Super hard wearing.
- Abrasive Silicon Carbide Mineral Insert
- 16 insert colours available
- Luminance Reflective Value (LRV)
- UV Stable

MATERIALS

Standard Supply: Cut to site required lengths, complete with countersunk holes, stainless steel screws and plastic plugs, or in full 4600mm lengths
Aluminium: 6063-T5, ASTM B221, Mill Finish
Inserts: Suregrip™ Sparkling Black (standard) Silicon Carbide Mineral Inserts, or Supagrit™ Coloured Silicon Carbide Mineral Inserts

COMPLIANCE

- **Wet Slip Test:** Mean British Pendulum (SRV) Classification - **P5**
- **Oil Wet Ramp Test:** Slip Resistant Acceptance Group - **R12**
- Tested to Australian Standard ISO 9239 Reaction to Fire Test for Flooring.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Tredlite 2 Accessories Guide](#)
- [Stair Tread Installation Instructions](#)
- [Luminance Contrast Information](#)
- [Slip Resistant Testing Information](#)
- [Code Compliance Information](#)
- [Colour Range Information](#)
- [Fire Test Information](#)
- [Adhesive Technical Data Sheet](#)
- [Full Product Catalogue](#)
- [Maintenance Guide](#)
- [Photo Gallery](#)
- [Warranty](#)