
Latham VS-VB Extra Visual Bars & Strips Safety Stair Tread Nosing Data Sheet TYPE-744VS-VB18









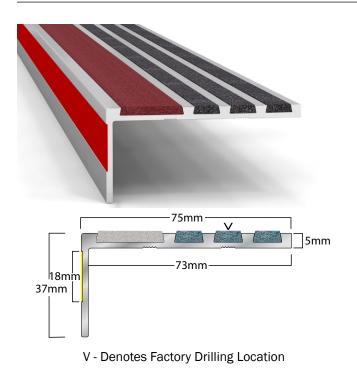



PRODUCT DETAILS - 744VS-VB18

Latham VS-VB stair tread nosing profiles are designed with a 25mm Safety Visual Indicator Bar, which contrasts with the surrounding floor finish. This stair tread nosing includes a bullnose indicator strip which is available with an 18mm sight line. The visual bullnose indicator can be replaced with a different indicator colour at any time.

FEATURES

- P5 Slip Classification.
- Super hard wearing.
- Abrasive Silicon Carbide Mineral Insert.
- 16 insert colours available.
- Luminance Reflective Value (LRV).
- UV Stable.

MATERIALS

Standard Supply: Cut to site required lengths, complete with countersunk holes, stainless steel screws and plastic plugs, or in full 4600mm lengths. Aluminium: 6063-T5, ASTM B221, Mill Finish. Inserts: Suregrip™ Sparkling Black (standard) Silicon Carbide Mineral Inserts, or Supagrit™ Coloured Silicon Carbide Mineral Inserts.

COMPLIANCE

- Wet Slip Test: Mean British Pendulum (SRV) Classification - P5
- Oil Wet Ramp Test: Slip Resistant Acceptance Group - R12
- Tested to Australian Standard ISO 9239 Reaction to Fire Test for Flooring.

FURTHER TECHNICAL SPECIFICATIONS

- · Website Link PDF and DWG Details
- Stair Tread Installation Instructions
- <u>Luminance Contrast Information</u>
- Slip Resistant Testing Information
- Code Compliance Information
- Colour Range Information
- Fire Test Information
- Adhesive Technical Data Sheet
- Full Product Catalogue
- Maintenance Guide
- Photo Gallery
- Accessories Guide
- Warranty



e sales@latham-australia.com

p +612 9879 7888

