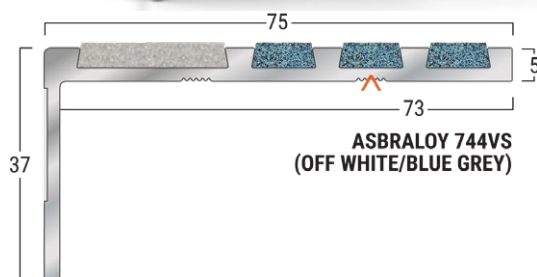
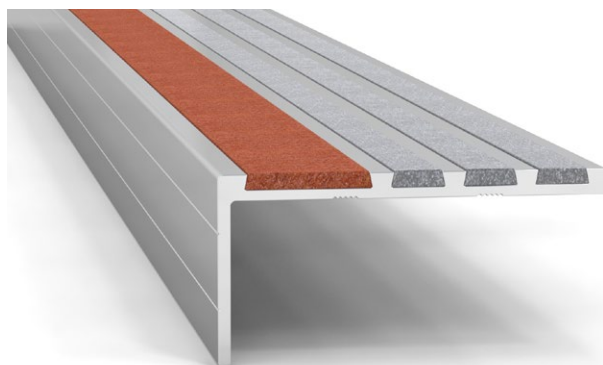












Latham VS-VB Extra Visual Bars & Strips Safety Stair Tread Nosing Data Sheet

TYPE-744VS



▲ - Denotes Factory Drilling Location



		
Sparkling Black (Standard) LRV: 28.9		
		
Smoke LRV: 41.58	Plum LRV: 40.62	Cactus Green LRV: 36.16
		
Terracotta LRV: 34.18	Blue Grey LRV: 37.11	Off White LRV: 50.17
		
Teal LRV: 31.19	Teak LRV: 35.75	Safety Yellow LRV: 41.14
		
Buff LRV: 40.81	Brown LRV: 32.75	Rose LRV: 47.10
		
Blue LRV: 32.01	Silver Grey LRV: 37.70	Lumo Luminescent Glow-In-The-Dark LRV: 51.62

PRODUCT DETAILS - 744VS

Latham VS-VB stair tread nosing profiles are designed with a 25mm Safety Visual Indicator Bar, which contrasts with the surrounding floor finish. The nosing can be recessed into new work or into existing floor finishes. It can be installed on most flooring finishes including stone, concrete, tile, terrazzo, timber, pavers, brick, carpet and vinyl.

FEATURES

- P5 Slip Classification.
- Super hard wearing.
- Abrasive Silicon Carbide Mineral Insert.
- 16 insert colours available.
- Luminance Reflective Value (LRV).
- UV Stable.

MATERIALS

Standard Supply: Cut to site required lengths, complete with countersunk holes, stainless steel screws and plastic plugs, or in full 4600mm lengths.

Aluminium: 6063-T5, ASTM B221, Mill Finish.

Inserts: Suregrip™ Sparkling Black (standard) Silicon Carbide Mineral Inserts, or Supagrit™ Coloured Silicon Carbide Mineral Inserts.

COMPLIANCE

- **Wet Slip Test:** Mean British Pendulum (SRV) Classification - **P5**
- **Oil Wet Ramp Test:** Slip Resistant Acceptance Group - **R12**
- Tested to Australian Standard ISO 9239 Reaction to Fire Test for Flooring.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Stair Tread Installation Instructions](#)
- [Luminance Contrast Information](#)
- [Slip Resistant Testing Information](#)
- [Code Compliance Information](#)
- [Colour Range Information](#)
- [Fire Test Information](#)
- [Adhesive Technical Data Sheet](#)
- [Full Product Catalogue](#)
- [Maintenance Guide](#)
- [Photo Gallery](#)
- [Accessories Guide](#)
- [Warranty](#)

w www.latham-australia.com

e sales@latham-australia.com

p +612 9879 7888

LATHAM
EST. 1953