

Latham Flat-Line Series Brass Expansion Joint Cover NBB



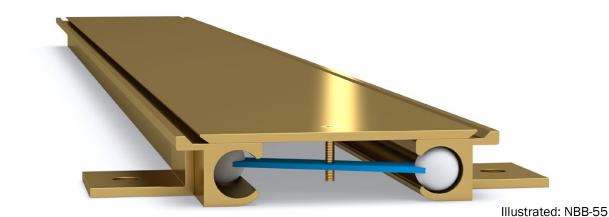

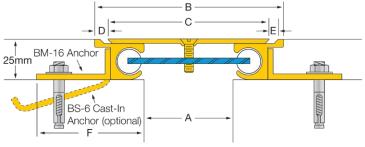

All anchors are supplied welded to the side members at approximately 475mm centres. BM-16 anchors are supplied factory drilled with 10mm holes at approximately 475mm centres

Solid Brass Code	Α	В	С	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
NBB-55	55	118	100	9	3	66	+34/-6mm	40mm	25mm	3mm
NBB-80	80	143	125	9	3	66	+34/-6mm	40mm	25mm	3mm
NBB-105	105	168	150	9	3	66	+34/-6mm	40mm	25mm	3mm
NBB-130	130	193	175	9	3	66	+34/-6mm	40mm	25mm	3mm



FEATURES

- Solid brass floor expansion joint cover.
- Pedestrian applications where even the slightest bump in a floor can not be tolerated.
- Robust system suited to pedestrian applications.
- 25mm depth below floor finish.
- Installed in a preformed recess or cast-in.

MATERIALS

- Brass 380 mill finish alloy.
- Spring steel treated centering bar with nylon spherical balls (at ~475mm centres).
- Supplied in 4000mm lengths (cover plates in 1800mm lengths).

IVINCE

- Supplied with BM-16 Block-Out Anchors welded to the side members at ~475mm centres with pre-drilled holes for 10mm fasteners.
- On request: BS-6 Cast-In Anchors can be supplied for cast-in applications.

FURTHER TECHNICAL SPECIFICATIONS

- Website Link PDF and DWG Details
- <u>Product Information</u>
- <u>Joint Specifications</u>
- Fire Rated Systems
- Full Product Catalogue
- Architectural Specifications
- Warranty









e sales@latham-australia.com

