



Latham Heavy Duty Series Aluminium Expansion Joint Cover with Stainless Steel Cover Plate HDS

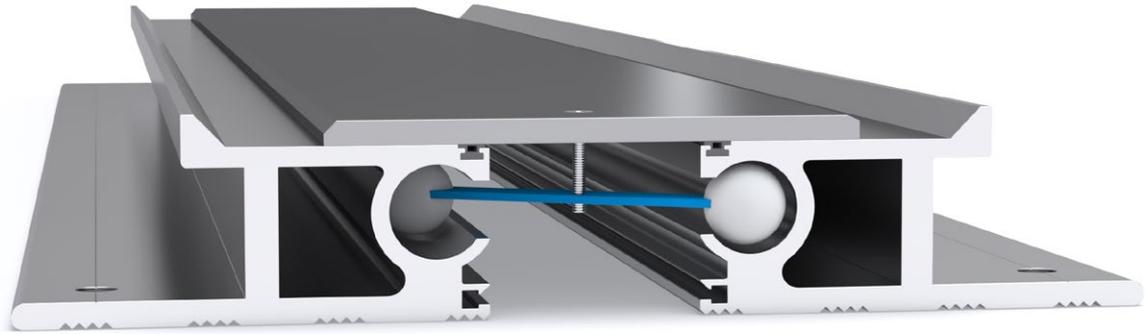

Illustrated: HDS-50

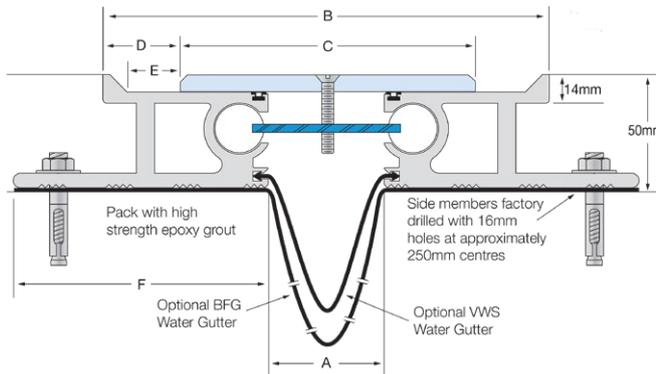

Stainless Steel Code	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
HDS-50	50	195	128	34	24	113	+/-36mm	72mm	50mm	6mm
HDS-75	75	220	153	34	24	113	+/-36mm	72mm	50mm	6mm
HDS-100	100	245	178	34	24	113	+/-36mm	72mm	50mm	6mm
HDS-150	150	295	228	34	24	113	+/-36mm	72mm	50mm	8mm
HDS-200	200	320	253	34	24	113	+/-36mm	72mm	50mm	8mm

FEATURES

- Aluminium floor expansion joint cover with a stainless steel cover plate, designed specifically for light vehicular and heavy pedestrian traffic.
- Joint can withstand impact and vibration generated by light vehicular traffic travelling at speeds up to 20 kph
- Installed in a pre-formed recess, in conjunction with mechanical fixings.

MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade, 2B finish stainless steel cover plates.
- Spring steel treated centering bar with nylon spherical balls (at ~475mm centres).
- Supplied in 3050mm lengths.

FIXINGS

- Side members pre-drilled with 16mm holes at ~250mm centres.
- Should be packed with high strength epoxy grout.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional
6-way movement



indoor & out-
door use



BFG/VWS
water gutter



fire rated (joint
widths >50mm)



vehicular