


Latham Heavy Duty Series Aluminium Expansion Joint Cover with Stainless Steel Cover Plate HHS



Illustrated: HHS-25

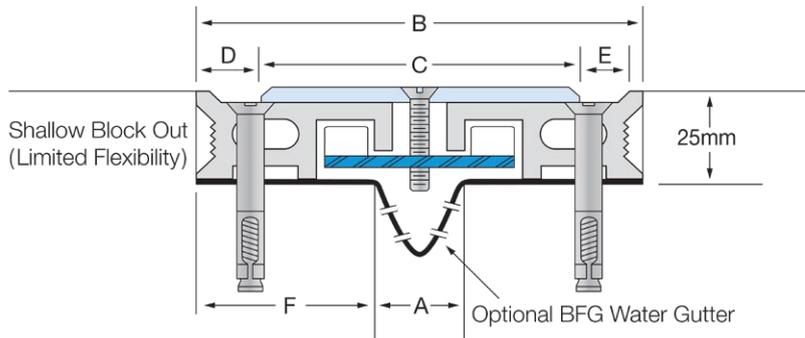

Stainless Steel Code	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
HHS-25	25	125	90	18	12	50	+25/-12mm	37mm	25mm	5mm
HHS-50	50	150	115	18	12	50	+/-25mm	50mm	25mm	5mm
HHS-75	75	175	140	18	12	50	+/-25mm	50mm	25mm	5mm
HHS-100	100	200	165	18	12	50	+/-25mm	50mm	25mm	6mm
HHS-150	150	250	215	18	12	50	+/-25mm	50mm	25mm	6mm
HHS-200	200	300	265	18	12	50	+/-25mm	50mm	25mm	7mm

FEATURES

- Aluminium floor expansion joint cover with a stainless steel coverplate.
- Designed for heavy pedestrian applications and can accommodate some light vehicular traffic.
- 25mm below floor finish.
- Installed in a pre-formed recess, in conjunction with mechanical fixings.

MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade, 2B finish stainless steel cover plates.
- Spring steel treated centering bar with elongated spherical rods (at ~475mm centres).
- Supplied in 3050mm lengths.

FIXINGS

- Side members pre-drilled at ~350mm centres for 8mm countersunk head fixings.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional
6-way movement



indoor & out-
door use



BFG water
gutter



fire rated (joint
widths >50mm)