



Latham PAVA-Inlay Series Aluminium Expansion Joint Cover ASMP

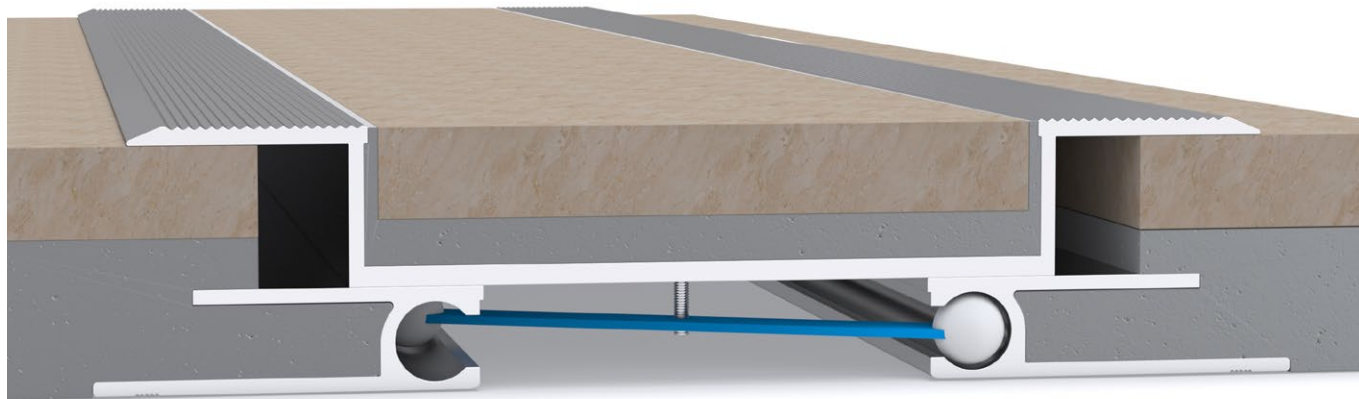

Illustrated: ASMP-50

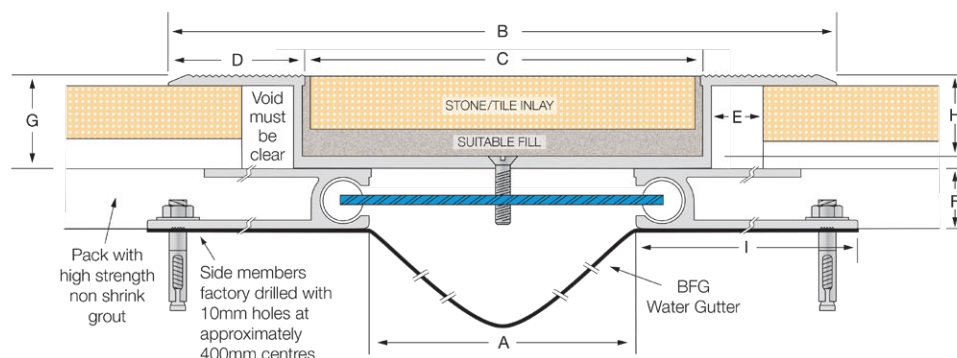

Aluminium Code	A	B	C	D	E	F	G	H	I	Movement	Total Available Movement	Cover Thickness
ASMP-25	25	250	150	50	25	22	35	30	93	+45/-15mm	60mm	4mm
ASMP-50	50	250	150	50	25	22	35	30	93	+45/-40mm	85mm	4mm
ASMP-75	75	250	150	50	25	22	35	30	93	+/-45mm	90mm	4mm
ASMP-100	100	250	150	50	25	22	35	30	93	+/-45mm	90mm	4mm

FEATURES

- Aluminium floor expansion joint cover.
- Designed to accommodate 30mm deep tile inlay.
- The tapered edge surface mounted cover plates control the movement in the structure.
- The joint has a serrated top aluminium flange for additional slip resistance.

MATERIALS


- Aluminium 6063-T5 mill finish alloy.
- Spring steel treated centering bar with nylon spherical balls (at ~475mm centres).
- Supplied in 3050mm lengths.

FIXINGS

- Side member pre-drilled at ~400mm centres for 10mm fasteners.
- The tile must be fixed with a suitable bedding agent.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional
6-way movement



indoor & out-
door use



BFG water
gutter



fire rated (joint
widths >50mm)