

Latham PAVA-Inlay Series Brass and Aluminium Expansion Joint Cover **BSMPL**





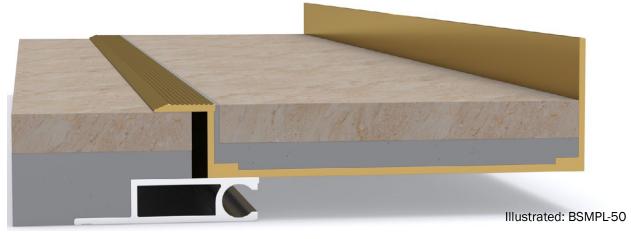



Brass Code	Α	В	С	D	E	F	G	н	ı	Movement	Total Available Movement	Cover Thickness
BSMPL-25	25	231	200	31	12	22	41	37	93	+/-12mm	24mm	4mm
BSMPL-50	50	231	200	31	12	22	41	37	93	+/-12mm	24mm	4mm
BSMPL-75	75	231	200	31	12	22	41	37	93	+/-12mm	24mm	4mm
BSMPL-100	100	231	200	31	12	22	41	37	93	+/-12mm	24mm	4mm

FEATURES

- Brass and aluminium floor expansion joint cover.
- Designed to accommodate 33mm deep tile inlay.
- The tapered edge surface mounted cover plates control the movement in the structure.
- The joint has a serrated top brass flange for additional slip resistance.

MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- · Brass 380 mill finish alloy.
- Supplied in 3050mm lengths (brass section supplied in 4000mm lengths).

FIXINGS

- Side member pre-drilled at ~400mm centres for 10mm fasteners.
- Wall member pre-drilled at ~475mm centres to accept countersunk head 6.5mm fixings.
- The tile must be fixed with a suitable bedding agent.

FURTHER TECHNICAL SPECIFICATIONS

- Website Link PDF and DWG Details
- Product Information
- Joint Specifications
- Fire Rated Systems
- <u>Full Product Catalogue</u>
- Architectural Specifications
- Warranty











e sales@latham-australia.com

p +612 9879 7888

