



# Latham PAVA-Inlay Series Brass and Aluminium Expansion Joint Cover BSMPL

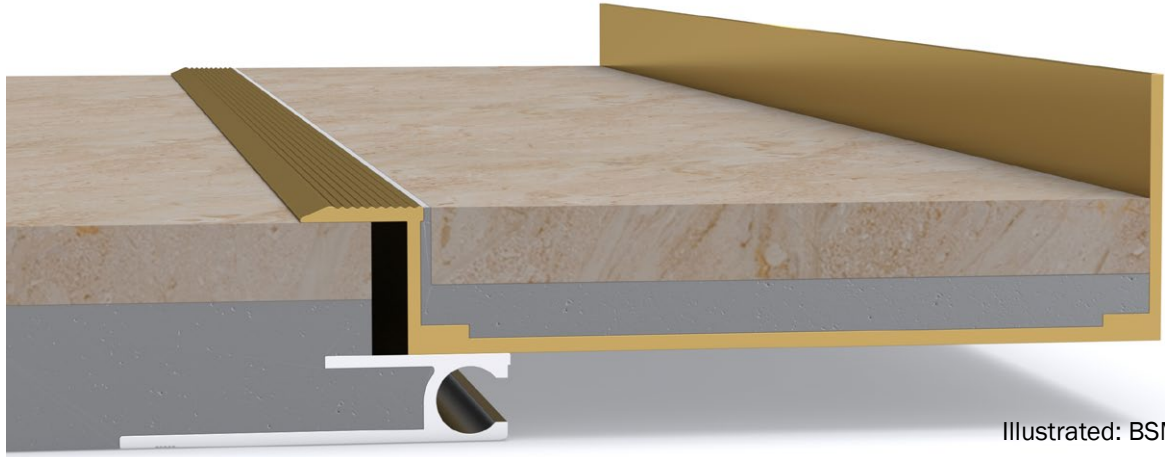

Illustrated: BSMPL-50

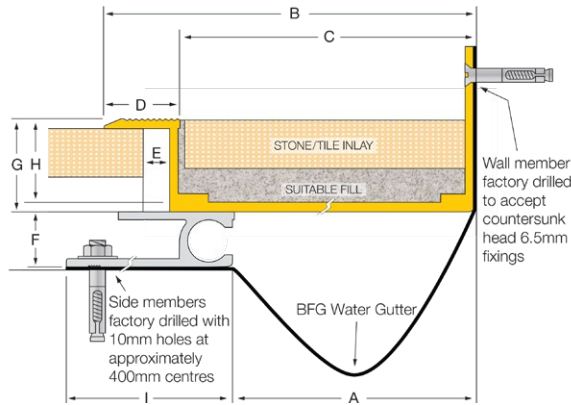

Brass Code	A	B	C	D	E	F	G	H	I	Movement	Total Available Movement	Cover Thickness
BSMPL-25	25	231	200	31	12	22	41	37	100	+/-12mm	24mm	4mm
BSMPL-50	50	231	200	31	12	22	41	37	100	+/-12mm	24mm	4mm
BSMPL-75	75	231	200	31	12	22	41	37	100	+/-12mm	24mm	4mm
BSMPL-100	100	231	200	31	12	22	41	37	100	+/-12mm	24mm	4mm

## FEATURES

- Brass and aluminium floor expansion joint cover.
- Designed to accommodate 33mm deep tile inlay.
- The tapered edge surface mounted cover plates control the movement in the structure.
- The joint has a serrated top brass flange for additional slip resistance.

## MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- Brass 380 mill finish alloy.
- Supplied in 3050mm lengths (brass section supplied in 4000mm lengths).

## FIXINGS

- Side member pre-drilled at ~400mm centres for 10mm fasteners.
- Wall member pre-drilled at ~475mm centres to accept countersunk head 6.5mm fixings.
- The tile must be fixed with a suitable bedding agent.

## FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional  
6-way movement



indoor & out-  
door use



BFG water  
gutter



fire rated (joint  
widths >50mm)