



Latham PAVA-Inlay Series Aluminium Expansion Joint Cover SGALL

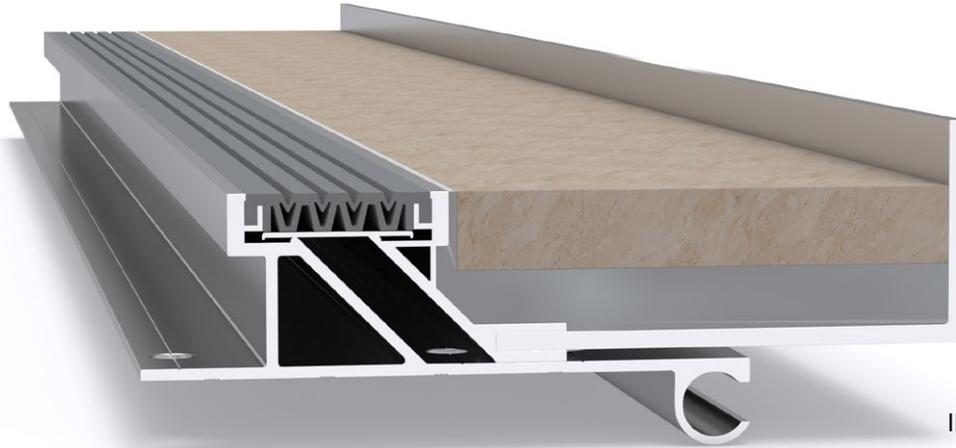

Illustrated: SGALL-50

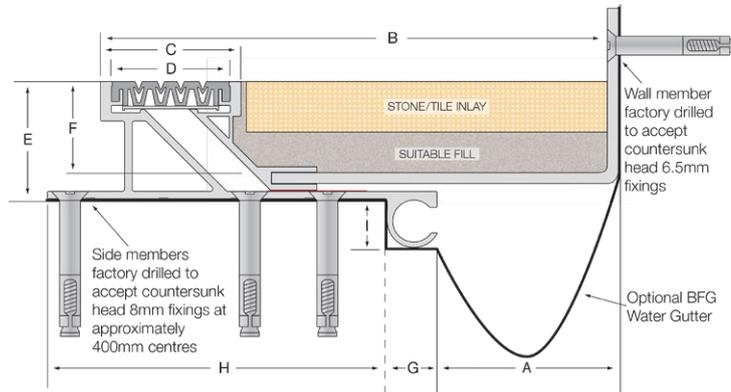

Aluminium Code	A	B	C	D	E	F	G	H	I	Movement	Total Available Movement
SGALL-50 (TM)	50	234	77	65	65	50	28	185	30	+/-10mm	20mm
SGALL-75 (TM)	75	259	77	65	65	50	28	185	30	+/-10mm	20mm
SGALL-100 (TM)	100	284	77	65	65	50	28	185	30	+/-10mm	20mm
SGALL-150 (TM)	150	334	77	65	65	50	28	185	30	+/-10mm	20mm
SGALL-200 (TM)	200	384	77	65	65	50	28	185	30	+/-10mm	20mm

FEATURES

- Aluminium floor-to-wall expansion joint cover.
- Designed to accommodate 50mm deep tile inlay.
- As opposed to sealant inserts which depress and debond, the Santoprene offers a maintenance free, neat, tidy, even wearing insert, able to cope with the required movement and traffic.

MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- Grey santoprene inserts (standard), buff and black available on request.
- Supplied in 3050mm lengths.

FIXINGS

- Side members pre-drilled at ~400mm centres for 8mm countersunk head fixings.
- Wall member pre-drilled at ~475mm centres to accept countersunk head 6.5mm fixings.
- The tile must be fixed with a suitable bedding agent.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional
6-way movement



indoor & out-
door use



BFG water
gutter



fire rated (joint
widths >50mm)