



Latham Surface-Line Series Aluminium Expansion Joint Cover with Brass Cover Plate
EXB

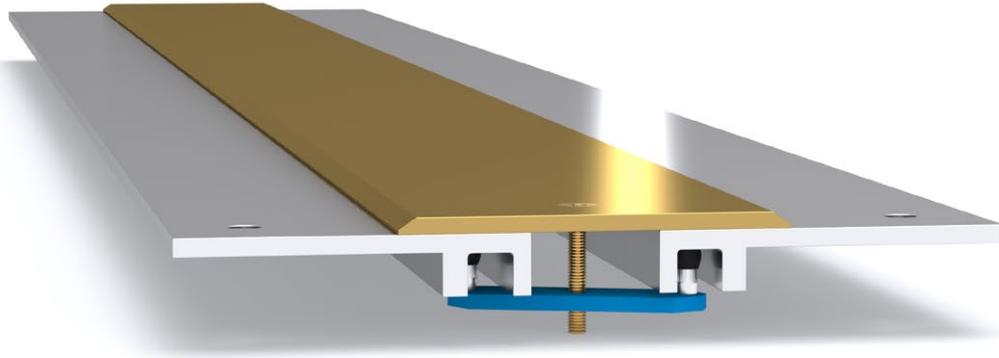

Illustrated: EXB-25

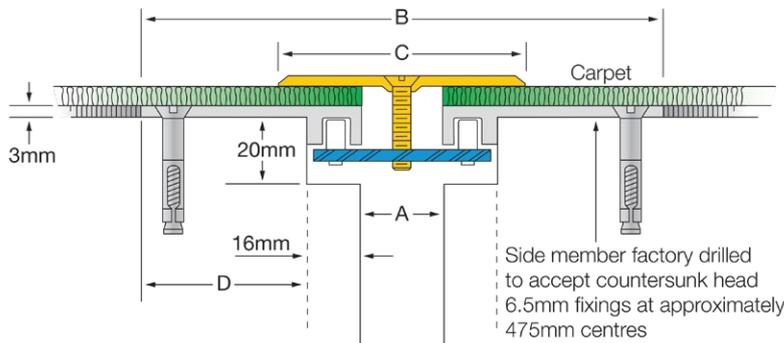

Brass Code smooth deck	A	B	C	D	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
EXB-25	25	155	75	49	+25/-15mm	40mm	Surface Mounted	3mm
EXB-50	50	180	100	49	+/-25mm	50mm	Surface Mounted	3mm
EXB-75	75	205	125	49	+/-25mm	50mm	Surface Mounted	3mm
EXB-100	100	235	150	49	+/-25mm	50mm	Surface Mounted	3mm
EXB-150	150	335	200	49	+/-25mm	50mm	Surface Mounted	4mm

FEATURES

- Aluminium floor expansion joint cover with a brass cover plate.
- Designed to finish flush with the surrounding floor finish (can be suitably packed up to height if required).
- Installed into a minimal recess, or providing the joint width is 62mm or larger, the system can simply hang over the edge of the slabs and no recess is required.

MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- Brass 380 mill finish alloy cover plate.
- Supplied in 3050mm lengths (brass cover plates supplied in 4000mm lengths).
- Spring steel treated centering bar with elongated spherical rods (at ~475mm centres).

FIXINGS

- Side and wall members pre-drilled at ~475mm centres to accept countersunk head 6.5mm fixings.
- We recommend Latham Thixotropic Epoxy Adhesive be used in conjunction for superior securing.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional
6-way movement



indoor use



fire rated (joint
widths >50mm)