




Latham Surface-Line Series Aluminium Expansion Joint Cover  
**G-25/G-25A**



Illustrated: G-25

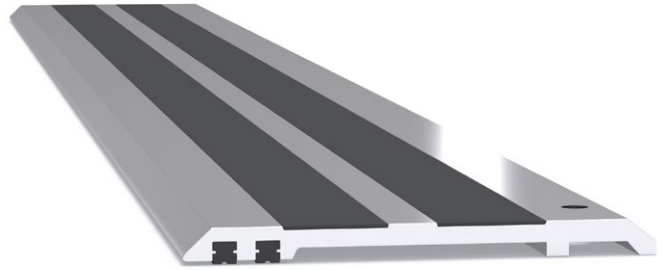

Illustrated: G-25A

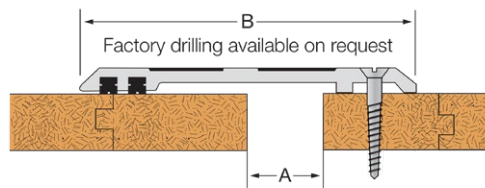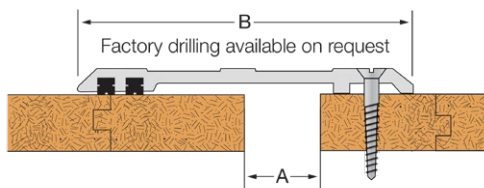

Aluminium Code ribbed deck	A	B	Movement	Total Available Movement	Overall Depth
G-25	25	110	+/-25mm	50mm	Surface Mounted 7mm
G-25A	25	110	+/-25mm	50mm	Surface Mounted 7mm

**FEATURES**

- Aluminium surface mounted slip joint cover.
- The Neoprene inserts and the extra depth of the cover plate allow 2-way directional movement and are specially designed for gymnasium type applications, where the vibration and movement is great.

**MATERIALS**

- Aluminium 6063-T5 mill finish alloy.
- Neoprene rubber slide extrusions.
- The G-25A is supplied with 2 x 25mm wide re-surfacing slip resistant inserts installed.
- Standard slip resistant insert colour is black (other colours are available on request).
- Supplied in 3050mm lengths.

**FIXINGS**

- The cover plates should be rigidly fixed to 1 side of the expansion joint as detailed.
- Optional factory drilling and fixings are available on request.

**FURTHER TECHNICAL SPECIFICATIONS**

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional 2-way movement



indoor use