




# Latham Ultimate Series Brass Expansion Joint Cover CAB

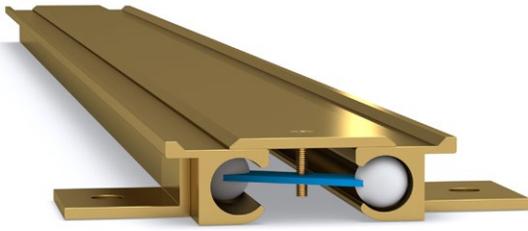


CAB-25 to CAB-50

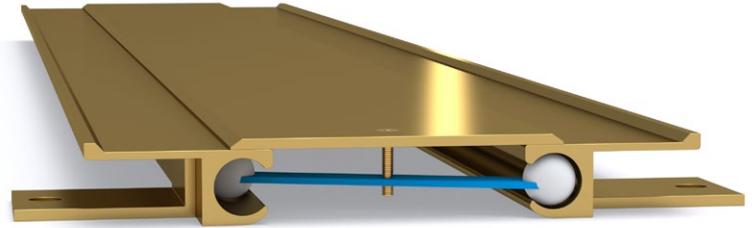

CAB-51 to CAB-150

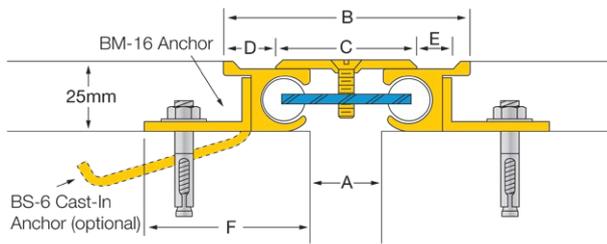

All anchors are supplied welded to the side members at approximately 475mm centres. BM-16 anchors are supplied factory drilled with 10mm holes at approximately 475mm centres

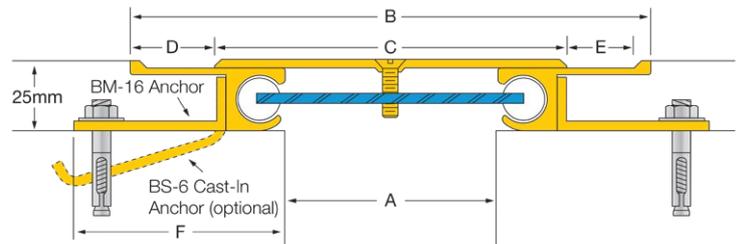

All anchors are supplied welded to the side members at approximately 475mm centres. BM-16 anchors are supplied factory drilled with 10mm holes at approximately 475mm centres

Brass Code smooth deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
CAB-25	25	86	50	18	13	60	+20/-15mm	35mm	25mm	3mm
CAB-50	50	111	75	18	13	60	+20/-25mm	45mm	25mm	3mm
CAB-51	50	160	100	30	25	75	+/-40mm	80mm	25mm	3mm
CAB-75	75	185	125	30	25	75	+40/-50mm	90mm	25mm	3mm
CAB-100	100	210	150	30	25	75	+40/-50mm	90mm	25mm	5mm
CAB-150	150	260	200	30	25	75	+40/-50mm	90mm	25mm	5mm



## FEATURES

- Solid brass floor expansion joint cover.
- Robust system suited to pedestrian applications.
- 25mm depth below floor finish.
- Installed in a preformed recess or cast-in.

## MATERIALS


- Brass 380 mill finish alloy.
- Supplied in 4000mm lengths.
- Spring steel treated centering bar with nylon spherical balls (at ~475mm centres).

## FIXINGS

- Supplied with BM-16 Block-Out Anchors welded to the side members at ~475mm centres with pre-drilled holes for 10mm fasteners.
- On request: BS-6 Cast-In Anchors can be supplied.

## FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional  
6-way movement



indoor use



factory  
curvable