



# Latham Ultimate Series Aluminium Expansion Joint Cover


## DCAL

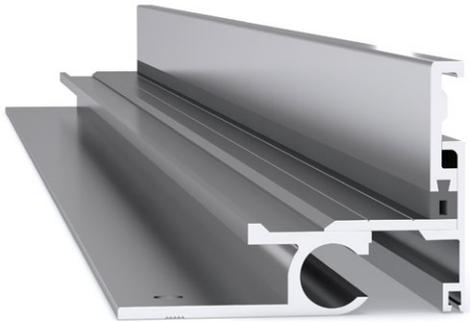

DCAL-25 to DCAL-75

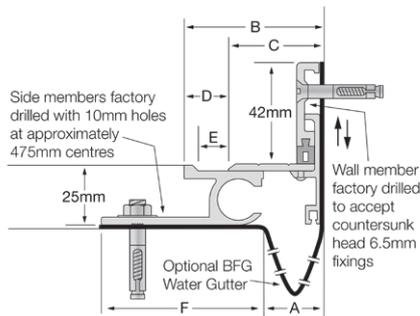

DCAL-60 to DCAL-150

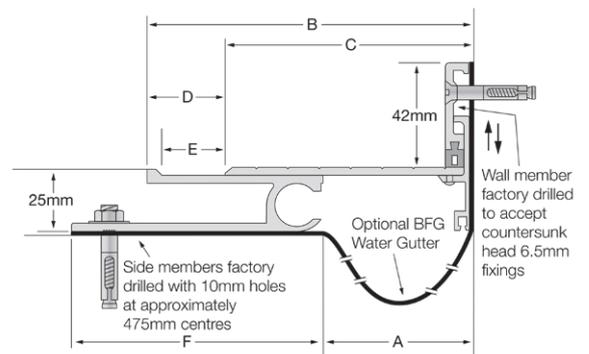

Aluminium Code ribbed deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
DCAL-25	25	56	37	18	12	68	+/-12mm	25mm	25mm	3mm
DCAL-50	50	82	62	18	12	68	+/-12mm	25mm	25mm	3mm
DCAL-75	75	106	87	18	12	68	+/-12mm	25mm	25mm	3mm
DCAL-60	60	130	99	40	35	105	+/-32mm	65mm	25mm	4mm
DCAL-110	110	180	145	40	35	105	+/-32mm	65mm	25mm	5mm
DCAL-150*	150	220	185	40	35	105	+/-32mm	65mm	25mm	5mm

\*Denotes smooth cover plate.



### FEATURES

- Aluminium floor-to-wall expansion joint cover.
- Robust system suited to pedestrian applications.
- 25mm depth below floor finish.
- 42mm vertical depth up the wall, above floor finish.
- Installed in a preformed recess.

### MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.

### FIXINGS

- Side member pre-drilled at ~475mm centres for 10mm fasteners.

- Wall member pre-drilled at ~475mm centres to accept countersunk head 6.5mm fixings.

### FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional  
6-way movement



indoor & out-  
door use



BFG water  
gutter



fire rated (joint  
widths >50mm)