


Latham Ultimate Series Aluminium Expansion Joint Cover



DCA



DCA-25 - DCA-50

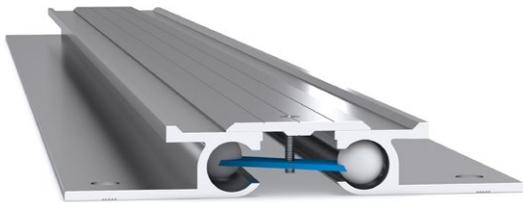

DCA-60 - DCA-150

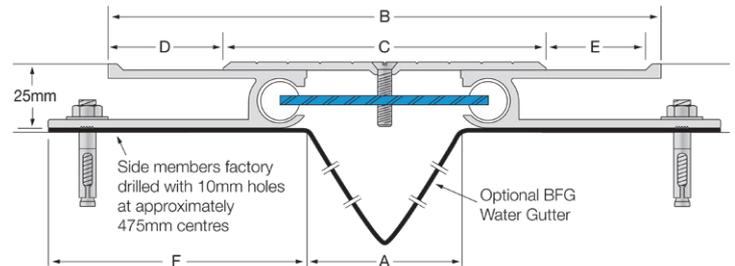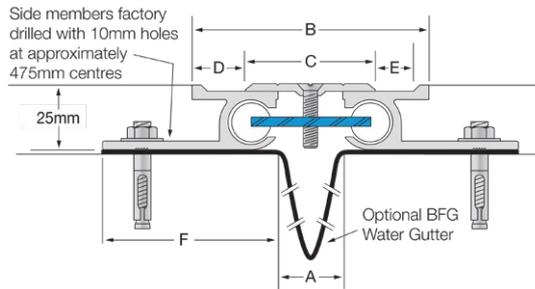

Aluminium Code ribbed deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
DCA-25	25	90	50	18	12	68	+20/-15mm	35mm	25mm	3mm
DCA-50	50	116	75	18	12	68	+20/-25mm	45mm	25mm	3mm
DCA-75	75	141	100	18	12	68	+20/-25mm	45mm	25mm	3mm
DCA-60	60	214	125	40	35	105	+55/-50mm	105mm	25mm	4mm
DCA-110	110	252	175	40	35	105	+55/-65mm	120mm	25mm	5mm
DCA-150*	150	292	215	40	35	105	+55/-65mm	120mm	25mm	5mm

*Denotes smooth cover plate.



FEATURES

- Aluminium floor expansion joint cover.
- Robust system suited to pedestrian applications.
- 25mm depth below floor finish.
- Installed in a preformed recess.

MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.
- Spring steel treated centering bar with nylon spherical balls (at ~475mm centres).

FIXINGS

- Side member pre-drilled at ~475mm centres for 10mm fasteners.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional
6-way movement



indoor & out-
door use



BFG water
gutter



fire rated (joint
widths >50mm)