




# Latham Ultimate Series Aluminium Expansion Joint Cover with Stainless Steel Cover Plate DCS



DCS-25 to DCS-75

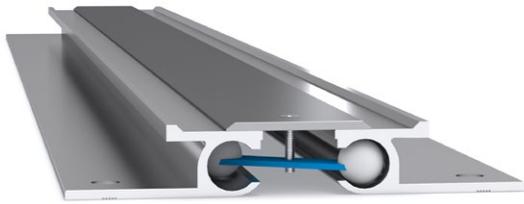

DCS-60 to DCS-150

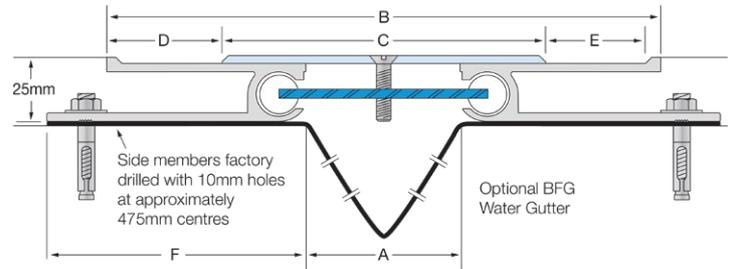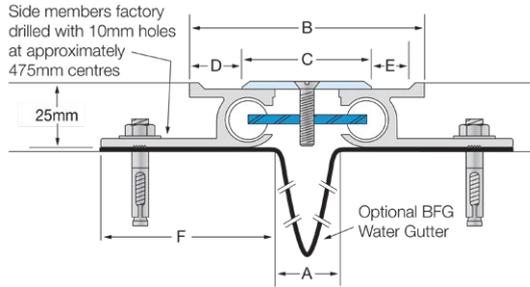

Stainless Steel Code smooth deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
DCS-25	25	90	50	18	12	68	+20/-15mm	35mm	25mm	3mm
DCS-50	50	116	75	18	12	68	+20/-25mm	45mm	25mm	3mm
DCS-75	75	141	100	18	12	68	+20/-25mm	45mm	25mm	3mm
DCS-60	60	214	125	40	35	105	+55/-50mm	105mm	25mm	3mm
DCS-110	110	252	175	40	35	105	+55/-65mm	120mm	25mm	3mm
DCS-150	150	292	215	40	35	105	+55/-65mm	120mm	25mm	5mm



## FEATURES

- Aluminium floor expansion joint cover with a stainless steel cover plate.
- Robust system suited to pedestrian applications.
- 25mm depth below floor finish.
- Installed in a preformed recess.

## MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade, 2B finish stainless steel cover plates.
- Supplied in 3050mm lengths.
- Spring steel treated centering bar with nylon spherical balls (at ~475mm centres).

## FIXINGS

- Side member pre-drilled at ~475mm centres for 10mm fasteners.

## FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional  
6-way movement



indoor & out-  
door use



BFG water  
gutter



fire rated (joint  
widths >50mm)