





# Latham Ultimate Series Brass Expansion Joint Cover LAB

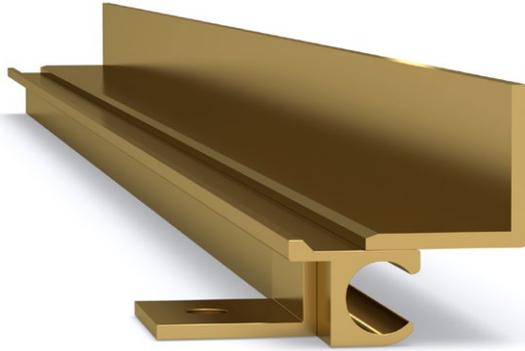

LAB-25 to LAB-50

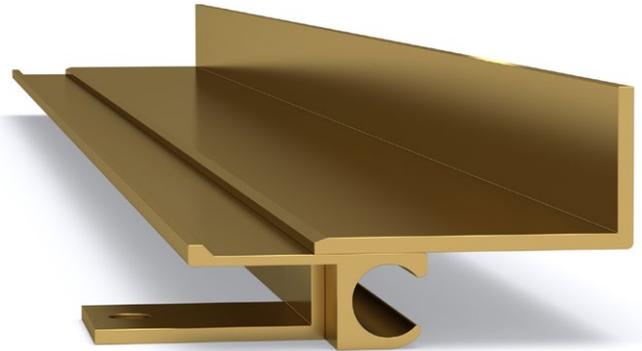

LAB-51 to LAB-150

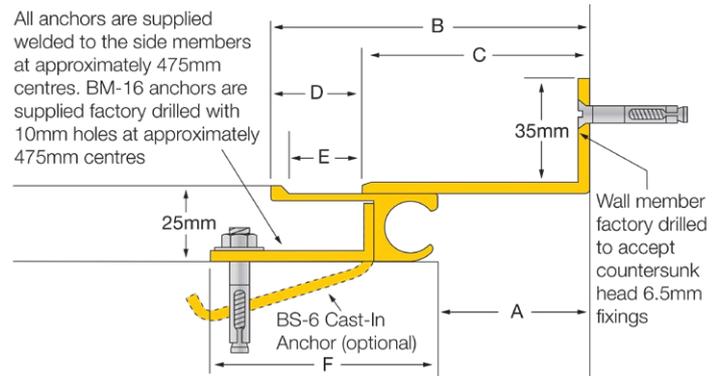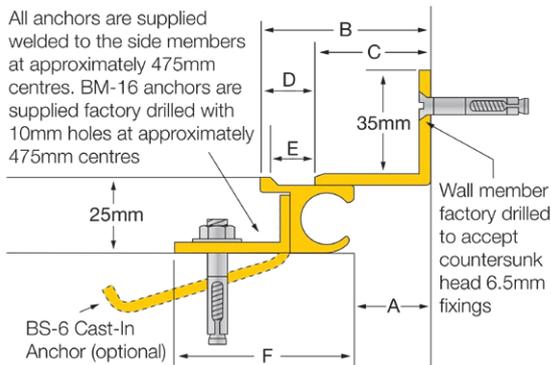

| Brass Code<br>smooth deck | A   | B   | C   | D  | E  | F  | Movement | Total Available<br>Movement | Overall<br>Depth | Cover Plate<br>Thickness |
|---------------------------|-----|-----|-----|----|----|----|----------|-----------------------------|------------------|--------------------------|
| LAB-25                    | 25  | 56  | 38  | 18 | 12 | 60 | +/-12mm  | 24mm                        | 25mm             | 3mm                      |
| LAB-50                    | 50  | 82  | 64  | 18 | 12 | 60 | +/-12mm  | 24mm                        | 25mm             | 3mm                      |
| LAB-51                    | 50  | 105 | 75  | 30 | 25 | 75 | +/-25mm  | 50mm                        | 25mm             | 3mm                      |
| LAB-75                    | 75  | 130 | 100 | 30 | 25 | 75 | +/-25mm  | 50mm                        | 25mm             | 3mm                      |
| LAB-100                   | 100 | 155 | 125 | 30 | 25 | 75 | +/-25mm  | 50mm                        | 25mm             | 5mm                      |
| LAB-150                   | 150 | 205 | 175 | 30 | 25 | 75 | +/-25mm  | 50mm                        | 25mm             | 5mm                      |



## FEATURES

- Solid brass floor-to-wall expansion joint cover.
- Robust system suited to pedestrian applications.
- 25mm depth below floor finish.
- Installed in a preformed recess or cast-in.

- On request: BS-6 Cast-In Anchors can be supplied for cast-in applications.
- Wall member pre-drilled at ~475mm centres to accept countersunk head 6.5mm fixings.

## MATERIALS

- Brass 380 mill finish alloy.
- Supplied in 4000mm lengths.

## FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)

## FIXINGS

- Supplied with BM-16 Block-Out Anchors welded to the side members at ~475mm centres with pre-drilled holes for 10mm fasteners.



multi directional  
6-way movement



indoor use



factory  
curvable