





# Latham Ultimate Series Aluminium Expansion Joint Cover with Stainless Steel Cover Plate LS

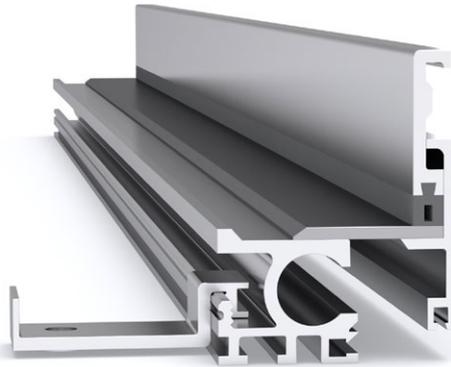

LS-25 to LS-50

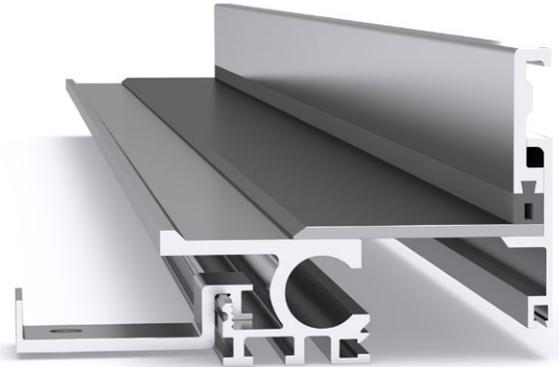

LS-45 to LS-150

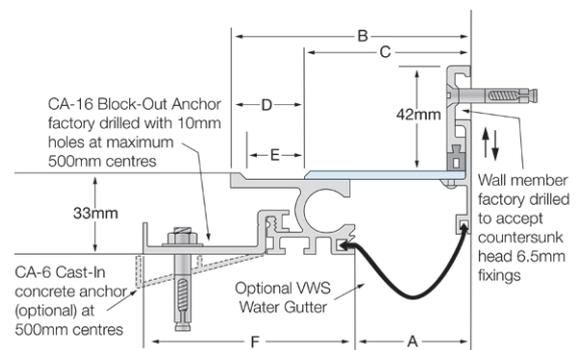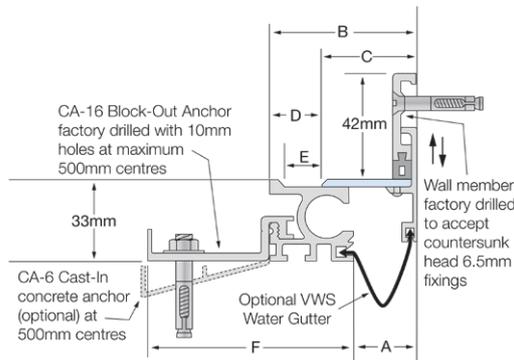

Stainless Steel Code smooth deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
LS-25	25	56	38	18	12	82	+/-12mm	25mm	33mm	3mm
LS-50	50	81	63	18	12	82	+/-12mm	25mm	33mm	3mm
LS-45	46	91	66	25	20	82	+/-20mm	40mm	33mm	3mm
LS-75	71	111	91	25	20	82	+/-20mm	40mm	33mm	3mm
LS-100	96	137	116	25	20	82	+/-20mm	40mm	33mm	3mm
LS-150	146	187	166	25	20	82	+/-20mm	40mm	33mm	5mm



## FEATURES

- Aluminium floor-to-wall expansion joint cover with a stainless steel cover plate.
- Robust system suited to pedestrian applications.
- 33mm depth below floor finish.
- 42mm vertical depth up the wall, above floor finish.
- Installed in a preformed recess or cast-in.

## MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade, 2B finish stainless steel cover plates.
- Supplied in 3050mm lengths.

## FIXINGS

- Supplied with clip-on CA-16 Block-Out Anchors (10mm holes pre-drilled) installed at ~500mm centres.
- On request: CA-6 Cast-In Anchors can be supplied.
- Wall member pre-drilled at ~475mm centres to accept countersunk head 6.5mm fixings.

## FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional  
6-way movement



indoor & out-  
door use



VWS water  
gutter



factory  
curvable