


# Latham Ultimate Series Aluminium Expansion Joint Cover NSAL



Illustrated: NSAL-20

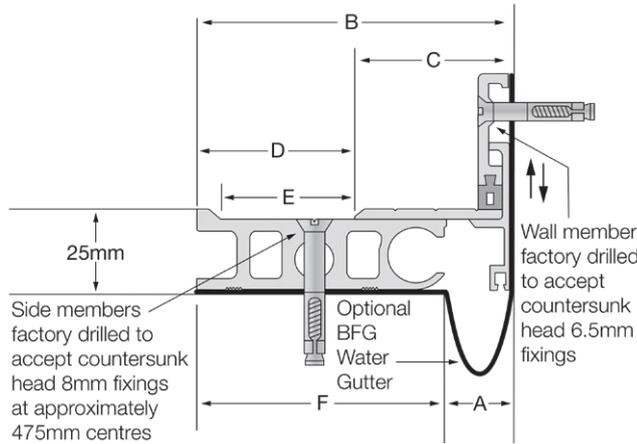

Aluminium Code ribbed deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
NSAL-20	20	97	55	46	40	77	+25/-8mm	33mm	25mm	3mm
NSAL-30	30	107	65	41	35	77	+30/-18mm	48mm	25mm	3mm
NSAL-55	55	132	90	41	35	77	+30/-40mm	70mm	25mm	4mm
NSAL-80	80	157	115	41	35	77	+30/-40mm	70mm	25mm	5mm
NSAL-105	105	182	140	41	35	77	+30/-40mm	70mm	25mm	5mm

## FEATURES

- Aluminium floor-to-wall expansion joint cover.
- Robust system suited to pedestrian applications.
- 25mm depth below floor finish.
- 42mm vertical depth up the wall, above floor finish.
- Installed as a retrofit application.

## MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.

## FIXINGS

- Side member pre-drilled at ~475mm centres to accept countersunk head 8mm fixings.
- Wall member pre-drilled at ~475mm centres to accept countersunk head 6.5mm fixings.

## FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional  
6-way movement



indoor & out-  
door use



BFG water  
gutter



fire rated (joint  
widths >50mm)