



# Latham Ultimate Series Aluminium Expansion Joint Cover with Stainless Steel Cover Plate SAS (FASM 64)

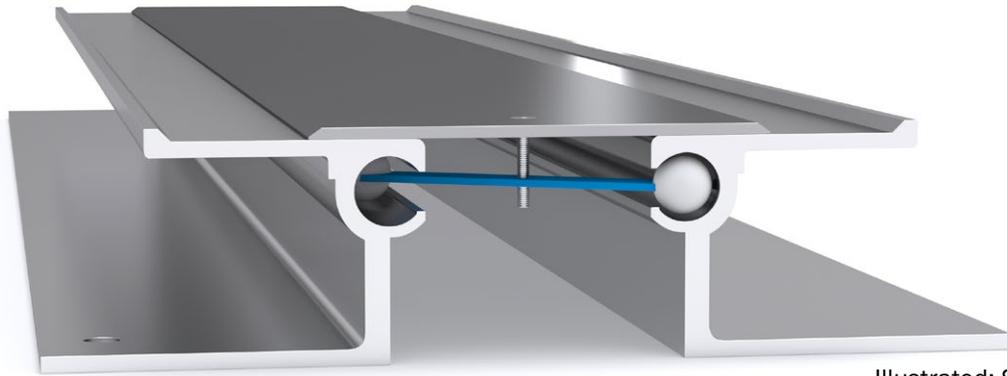

Illustrated: SAS-55 (FASM 64)

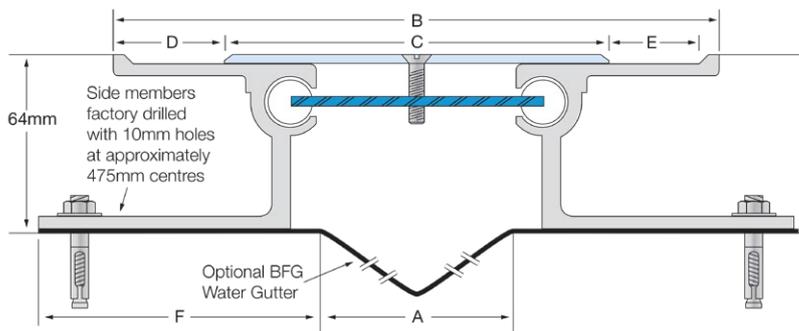

Stainless Steel Code smooth deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
SAS-30 (FASM 64)	30	182	100	40	35	101	+65/-20mm	85mm	64mm	3mm
SAS-55 (FASM 64)	55	207	125	40	35	101	+65/-45mm	110mm	64mm	3mm
SAS-80 (FASM 64)	80	232	150	40	35	101	+/-65mm	130mm	64mm	3mm
SAS-105 (FASM 64)	105	257	175	40	35	101	+/-65mm	130mm	64mm	3mm
SAS-130 (FASM 64)	130	282	200	40	35	101	+/-65mm	130mm	64mm	5mm
SAS-155 (FASM 64)	155	307	225	40	35	101	+/-65mm	130mm	64mm	5mm

## FEATURES

- Aluminium floor expansion joint cover with a stainless steel cover plate.
- Robust system suited to pedestrian applications.
- 64mm depth below floor finish.
- Installed with terrazzo tiles, pavers, timber, stone, etc.

## MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade, 2B finish stainless steel cover plates.
- Supplied in 3050mm lengths.
- Spring steel treated centering bar with nylon spherical balls (at ~475mm centres).

## FIXINGS

- Side member pre-drilled at ~475mm centres for 10mm fasteners.

## FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional  
6-way movement



indoor & out-  
door use



BFG water  
gutter



fire rated (joint  
widths >50mm)