




Latham Ultimate Series Brass Expansion Joint Cover SLB (SSSM ▲)



SLB-25 (SSSM ▲) to SLB-50 (SSSM ▲)

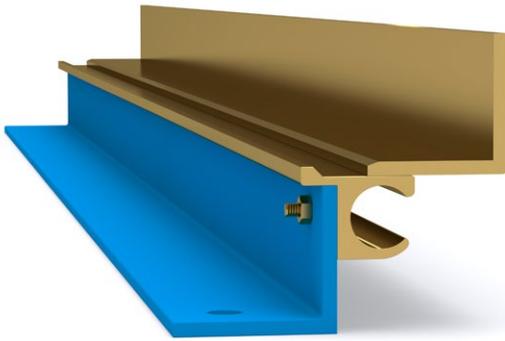

SLB-51 (SSSM ▲) to SLB-150 (SSSM ▲)

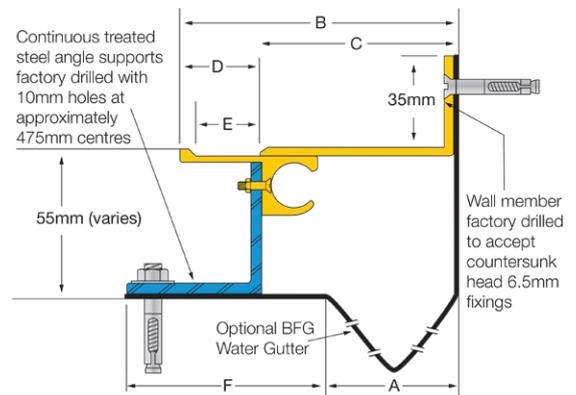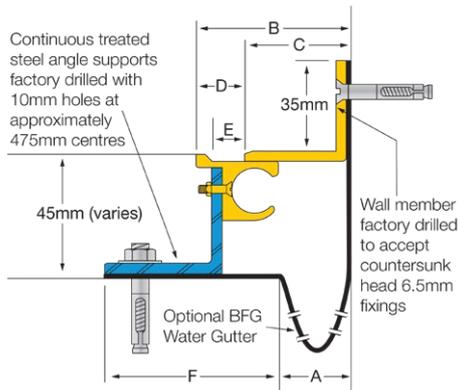

Brass Code smooth deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
SLB-25 (SSSM ▲)	25	56	38	18	12	•	+/-12mm	24mm	45mm	3mm
SLB-50 (SSSM ▲)	50	82	64	18	12	•	+/-12mm	24mm	45mm	3mm
SLB-51 (SSSM ▲)	50	105	75	30	25	•	+/-25mm	50mm	55mm	3mm
SLB-75 (SSSM ▲)	75	130	100	30	25	•	+/-25mm	50mm	55mm	3mm
SLB-100 (SSSM ▲)	100	155	125	30	25	•	+/-25mm	50mm	55mm	5mm
SLB-150 (SSSM ▲)	150	205	175	30	25	•	+/-25mm	50mm	55mm	5mm

▲ Specify required depth: 45mm, 55mm, 70mm, 80mm, 95mm, 105mm, 130mm & 155mm
 • "F" distance subject to required depth



FEATURES

- Solid brass floor-to-wall expansion joint cover.
- Robust system suited to pedestrian applications.
- Aluminium side member is installed on a continuous treated steel support, to allow for a variable floor depth below the finished floor (▲ - specify depth)
- Generally installed with paver/deep bed applications.

MATERIALS

- Brass 380 mill finish alloy.
- Treated steel angle supports.
- Supplied in 4000mm lengths.

FIXINGS

- Continuous treated steel support angles pre-drilled at ~475mm centres for 10mm fasteners.
- Wall member pre-drilled at ~475mm centres to accept countersunk head 6.5mm fixings.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional
6-way movement



indoor & out-
door use



BFG water
gutter



fire rated (joint
widths >50mm)



factory
curvable