




# Latham Ultimate Series Aluminium Expansion Joint Cover with Stainless Steel Cover Plate SLS (FASM 50)



SLS-25 (FASM 50) to SLS-50 (FASM 50)

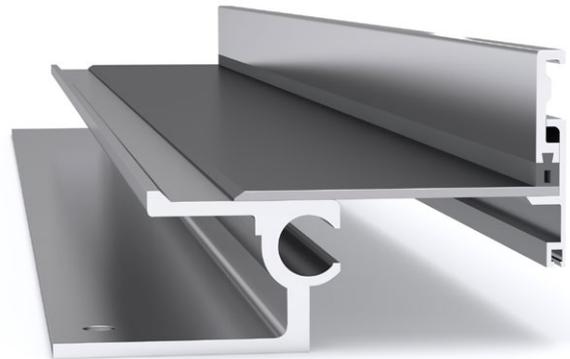

SLS-44 (FASM 50) to SLS-150 (FASM 50)

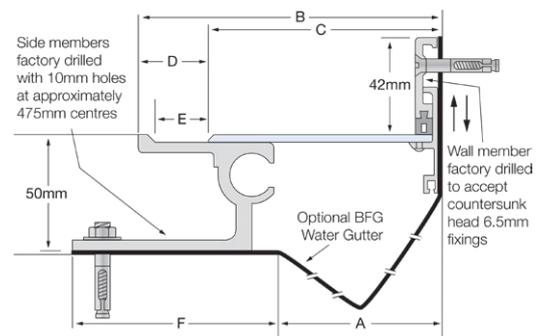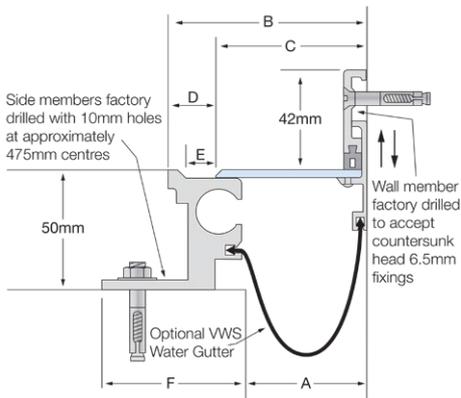

Stainless Steel Code smooth deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
SLS-25 (FASM 50)	25	58	38	18	13	60	+/-12mm	25mm	50mm	3mm
SLS-50 (FASM 50)	50	81	63	18	13	60	+/-12mm	25mm	50mm	3mm
SLS-44 (FASM 50)	44	99	72	32	26	87	+/-25mm	50mm	50mm	3mm
SLS-75 (FASM 50)	70	125	98	32	26	87	+/-25mm	50mm	50mm	3mm
SLS-100 (FASM 50)	95	150	123	32	26	87	+/-25mm	50mm	50mm	3mm
SLS-150 (FASM 50)	145	200	173	32	26	87	+/-25mm	50mm	50mm	5mm



## FEATURES

- Aluminium floor-to-wall expansion joint cover with a stainless steel cover plate.
- Robust system suited to pedestrian applications.
- 50mm depth below floor finish.
- 42mm vertical depth up the wall, above floor finish.
- Installed with terrazzo tiles, pavers, timber, stone, etc.

## MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade, 2B finish stainless steel cover plates.
- Supplied in 3050mm lengths.

## FIXINGS

- Side member pre-drilled at ~475mm centres for 10mm fasteners.
- Wall member pre-drilled at ~475mm centres to accept countersunk head 6.5mm fixings.

## FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional  
6-way movement



indoor & out-  
door use



VWS water  
gutter



fire rated (joint  
widths >50mm)