


# Latham Ultimate Series Aluminium Expansion Joint Cover with Stainless Steel Cover Plate SLS (FASM 64)



Illustrated: SLS-55 (FASM 64)

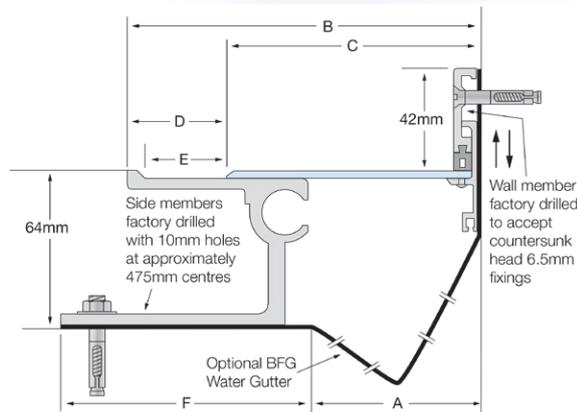

Stainless Steel Code smooth deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
SLS-30 (FASM 64)	30	105	65	40	35	101	+32/-25mm	57mm	64mm	3mm
SLS-55 (FASM 64)	55	130	90	40	35	101	+/-32mm	65mm	64mm	3mm
SLS-80 (FASM 64)	80	155	115	40	35	101	+/-32mm	65mm	64mm	3mm
SLS-105 (FASM 64)	105	180	140	40	35	101	+/-32mm	65mm	64mm	3mm
SLS-130 (FASM 64)	130	205	165	40	35	101	+/-32mm	65mm	64mm	5mm
SLS-155 (FASM 64)	155	230	190	40	35	101	+/-32mm	65mm	64mm	5mm

## FEATURES

- Aluminium floor-to-wall expansion joint cover with a stainless steel cover plate.
- Robust system suited to pedestrian applications.
- 64mm depth below floor finish.
- 42mm vertical depth up the wall, above floor finish.
- Installed with terrazzo tiles, pavers, timber, stone, etc.

## MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade, 2B finish stainless steel cover plates.
- Supplied in 3050mm lengths.

## FIXINGS

- Side member pre-drilled at ~475mm centres for 10mm fasteners.
- Wall member pre-drilled at ~475mm centres to accept countersunk head 6.5mm fixings.

## FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional  
6-way movement



indoor & out-  
door use



BFG water  
gutter



fire rated (joint  
widths >50mm)