




Latham Ultimate Series Aluminium Expansion Joint Cover with Stainless Steel Cover Plate SLS (SSSM ▲)

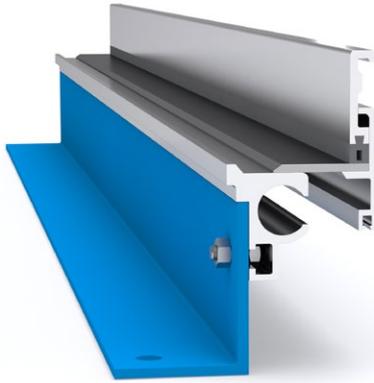

SLS-25 (SSSM ▲) to SLS-50 (SSSM ▲)

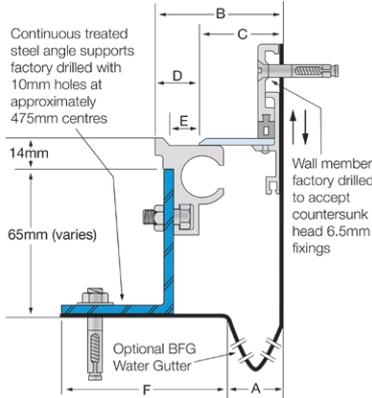

SLS-44 (SSSM ▲) to SLS-150 (SSSM ▲)

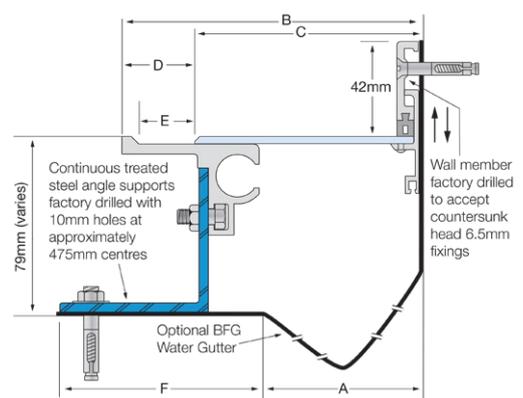

Stainless Steel Code smooth deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
SLS-25 (SSSM ▲)	25	56	38	18	13	•	+/-12mm	24mm	Specify	3mm
SLS-50 (SSSM ▲)	50	81	63	18	13	•	+/-12mm	24mm	Specify	3mm
SLS-44 (SSSM ▲)	44	110	78	32	26	•	+/-25mm	50mm	Specify	3mm
SLS-75 (SSSM ▲)	70	132	100	32	26	•	+/-25mm	50mm	Specify	3mm
SLS-100 (SSSM ▲)	95	157	125	32	26	•	+/-25mm	50mm	Specify	3mm
SLS-150 (SSSM ▲)	145	217	175	32	26	•	+/-25mm	50mm	Specify	5mm

▲ Specify required depth: 45mm, 55mm, 70mm, 80mm, 95mm, 105mm, 130mm & 155mm
 • "F" distance subject to required depth



FEATURES

- Aluminium floor-to-wall expansion joint cover with a stainless steel cover plate.
- Robust system suited to pedestrian applications.
- Aluminium side member is installed on a continuous treated steel support, to allow for a variable floor depth below the finished floor (▲ - specify depth)
- Generally installed with paver/deep bed applications.

MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade, 2B finish stainless steel cover plates.
- Treated steel angle supports.
- Supplied in 3050mm lengths.

FIXINGS

- Continuous treated steel support angles pre-drilled at ~475mm centres for 10mm fasteners.
- Wall member pre-drilled at ~475mm centres to accept countersunk head 6.5mm fixings.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional
6-way movement



indoor & out-
door use



BFG water
gutter



fire rated (joint
widths >50mm)



factory
curvable