


Latham Wall-Line Series Aluminium Expansion Joint Cover

K




25K - 50K

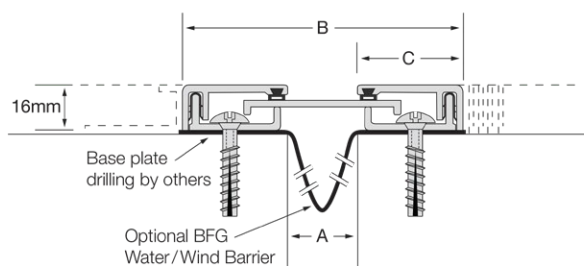

20 micron clear anodised finish (standard)
or brass colour anodised finish (specify brass colour finish).



75K - 150K

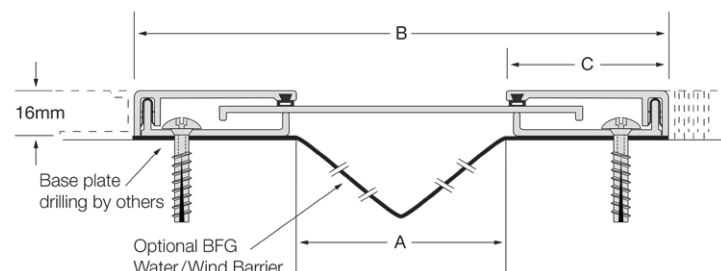

20 micron clear anodised finish (standard)
or brass colour anodised finish (specify brass colour finish).

Aluminium Code	A	B	C	Movement	Total Available Movement	Overall Depth
25K	25	101	38	+/-23mm	46mm	16mm
50K	50	126	38	+/-23mm	46mm	16mm
75K	75	191	58	+/-45mm	90mm	16mm
100K	100	216	58	+/-45mm	90mm	16mm
150K	150	266	58	+/-45mm	90mm	16mm



FEATURES

- Aluminium wall & ceiling expansion joint cover.
- Installed flush internally with 16mm wall board or appear almost flush with 13mm board due to the curvature of the joint edge.
- Can also be installed surface mounted.

MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.
- All visual surfaces come with a 20 micron clear anodised finish (contact a Latham representative for alternative anodising or powder coating options).

FIXINGS

- Side base sections should be site drilled for fixings at ~450mm centres.
- Suitable fixings should be sourced to suit the substrate.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional
6-way movement



indoor & out-
door use



BFG water
gutter



fire rated (joint
widths >50mm)