


# Latham Wall-Line Series Aluminium Expansion Joint Cover ML



Illustrated: 25ML

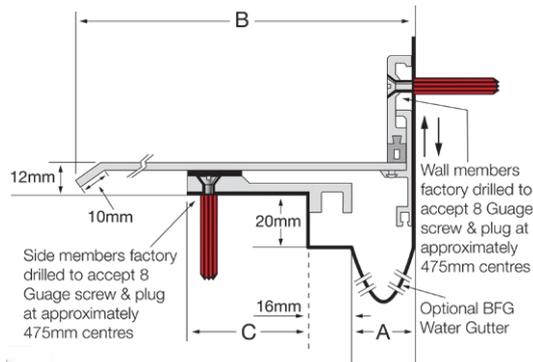

| Aluminium Code | A   | B   | C  | Movement | Total Available Movement | Overall Depth | Cover Plate Thickness |
|----------------|-----|-----|----|----------|--------------------------|---------------|-----------------------|
| 25ML           | 25  | 130 | 48 | +/-25mm  | 50mm                     | 12mm          | 3mm                   |
| 50ML           | 50  | 155 | 48 | +/-25mm  | 50mm                     | 12mm          | 3mm                   |
| 75ML           | 75  | 180 | 48 | +/-25mm  | 50mm                     | 12mm          | 3mm                   |
| 100ML          | 100 | 205 | 48 | +/-25mm  | 50mm                     | 12mm          | 3mm                   |
| 150ML          | 150 | 255 | 48 | +/-25mm  | 50mm                     | 12mm          | 3mm                   |

## FEATURES

- Aluminium wall-to-ceiling expansion joint cover.
- Suitable for surface mounted applications and sit proud of the surface by 5mm.
- 12mm deep below floor finish.
- The actual movement available will depend on the physical structural joint and installation width.

## MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.
- Contact a Latham representative for alternative anodising or powder coating options.

## FIXINGS

- Side and wall members factory drilled to accept 8 gauge screw and plug at ~475mm centres.

## FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional  
6-way movement



indoor & out-  
door use



BFG water  
gutter



fire rated (joint  
widths >50mm)