



Latham Wall-Line Series Aluminium Expansion Joint Cover

M

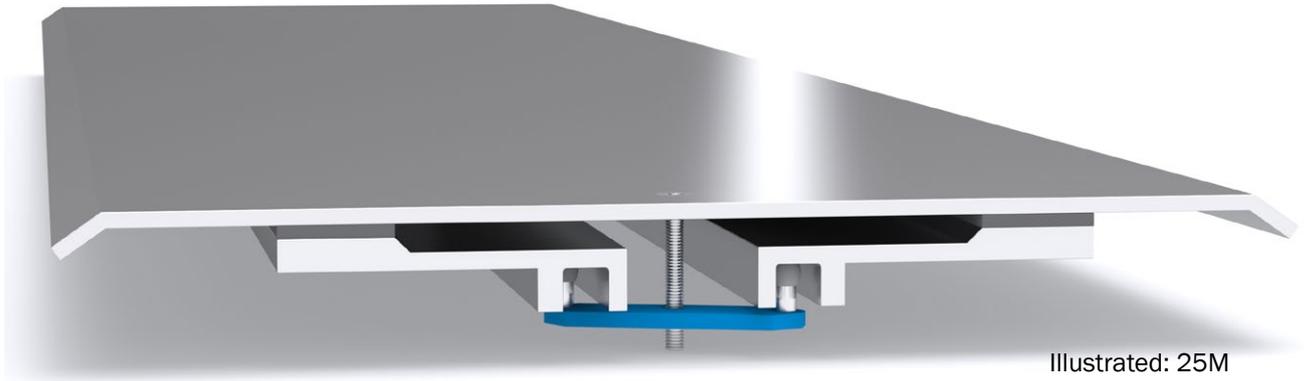

Illustrated: 25M

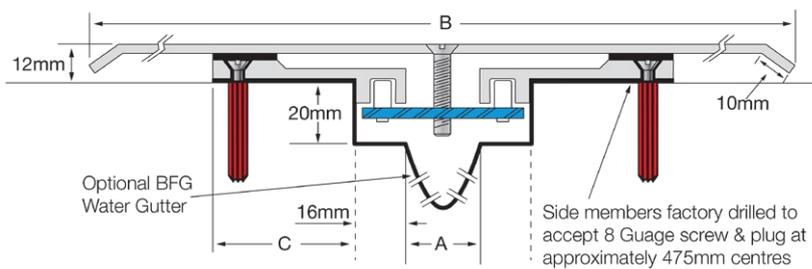

Aluminium Code	A	B	C	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
25M	25	235	48	+30/-17mm	47mm	12mm	3mm
50M	50	260	48	+50/-42mm	92mm	12mm	3mm
75M	75	285	48	+/-50mm	100mm	12mm	3mm
100M	100	310	48	+/-50mm	100mm	12mm	3mm
150M	150	360	48	+/-50mm	100mm	12mm	3mm

FEATURES

- Aluminium wall & ceiling expansion joint cover.
- Suitable for surface mounted applications and sit proud of the surface by 5mm.
- 12mm deep below floor finish.
- The actual movement available will depend on the physical structural joint and installation width.

MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.
- Spring steel treated centering bar with elongated spherical rods (at ~475mm centres).
- Contact a Latham representative for alternative anodising or powder coating options.

FIXINGS

- Side members factory drilled to accept 8 gauge screw and plug at ~475mm centres.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional 6-way movement



indoor & outdoor use



BFG water gutter



fire rated (joint widths >50mm)