


THROUGH BED NEOPRENE-X-PANSION LOC STRIPS

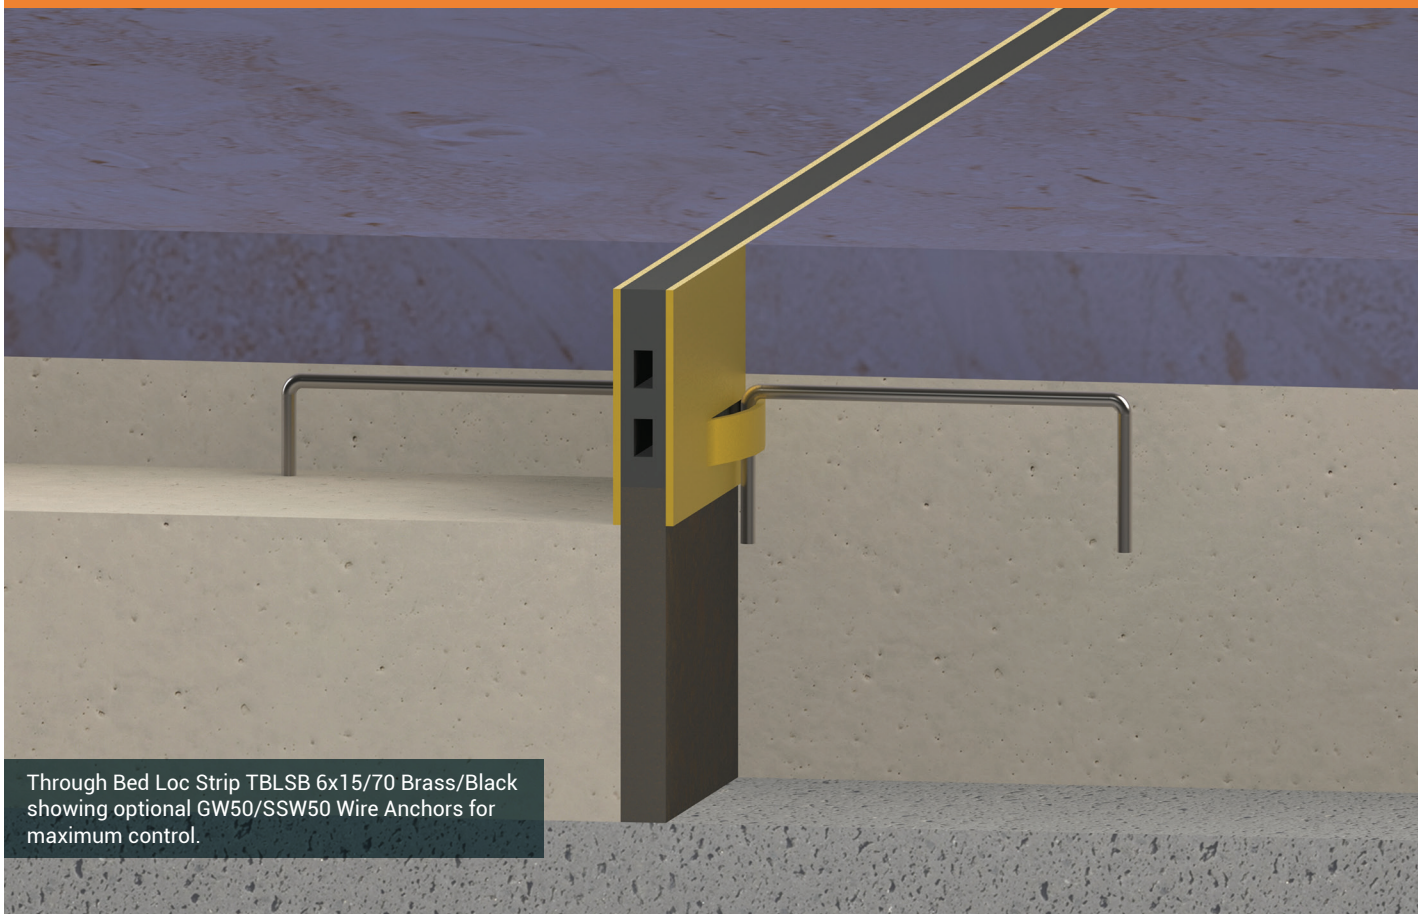

Through Bed Loc Strip TBLSB 6x15/70 Brass/Black showing optional GW50/SSW50 Wire Anchors for maximum control.

Through Bed Loc[®] Strips 6MM NEOPRENE INSERT

The tables and information on these pages indicate some of the available 6mm Through Bed Loc[®] Strip configurations. Illustrations show some of the colour combinations available for the neoprene inserts and the metal side plates.

Latham Neoprene-X-Pansion Through Bed Loc[®] Strips, with closed cell polyethylene tail, are the best method of ensuring that the void under the Loc[®] Strip through the bed to the structural slab is maintained and free of debris.

Latham 6mm Neoprene-X-Pansion Through Bed Loc[®] Strips are generally used in interior applications where the expected thermal expansion of floor finish would be considered less than an external application. They are also suitable for external applications as well, however the bay sizes or distance between the strips will need to be reduced (see pages 4-6 for further set out and spacing details).


Latham 6mm Neoprene-X-Pansion Through Bed Loc[®] Strips with 1mm Bars and Zinc and 0.7mm Stainless Steel side plates are intended to be used in all hard flooring applications and are designed to be installed in conjunction with wet bedded flooring applications (see page 53 for further installation details).

Latham 6mm Neoprene-X-Pansion Through Bed Loc[®] Strips are supplied in standard 1800mm lengths and should be installed so as to minimise the frequency of butt joints and short lengths. Also 3-way and 4-way butt joint intersections should be avoided (see page 54 for further details).

All Latham Neoprene-X-Pansion Through Bed Loc[®] Strips are designed specifically for use with optional GW50/SSW50 Wire Anchors for maximum control. For further information and specification details available, see page 55 or for full details visit our website www.latham-australia.com

Latham Neoprene-X-Pansion Through Bed Loc[®] Strips should be installed in all locations of stress concentration; at changes in direction; wherever localised movement is anticipated and around rigid and fixed large objects such as columns, stair and lift wells, light posts, across driveways, at access covers, across doorways and anywhere that may impede expansion and contraction of the floor finish.

6MM NEOPRENE INSERT

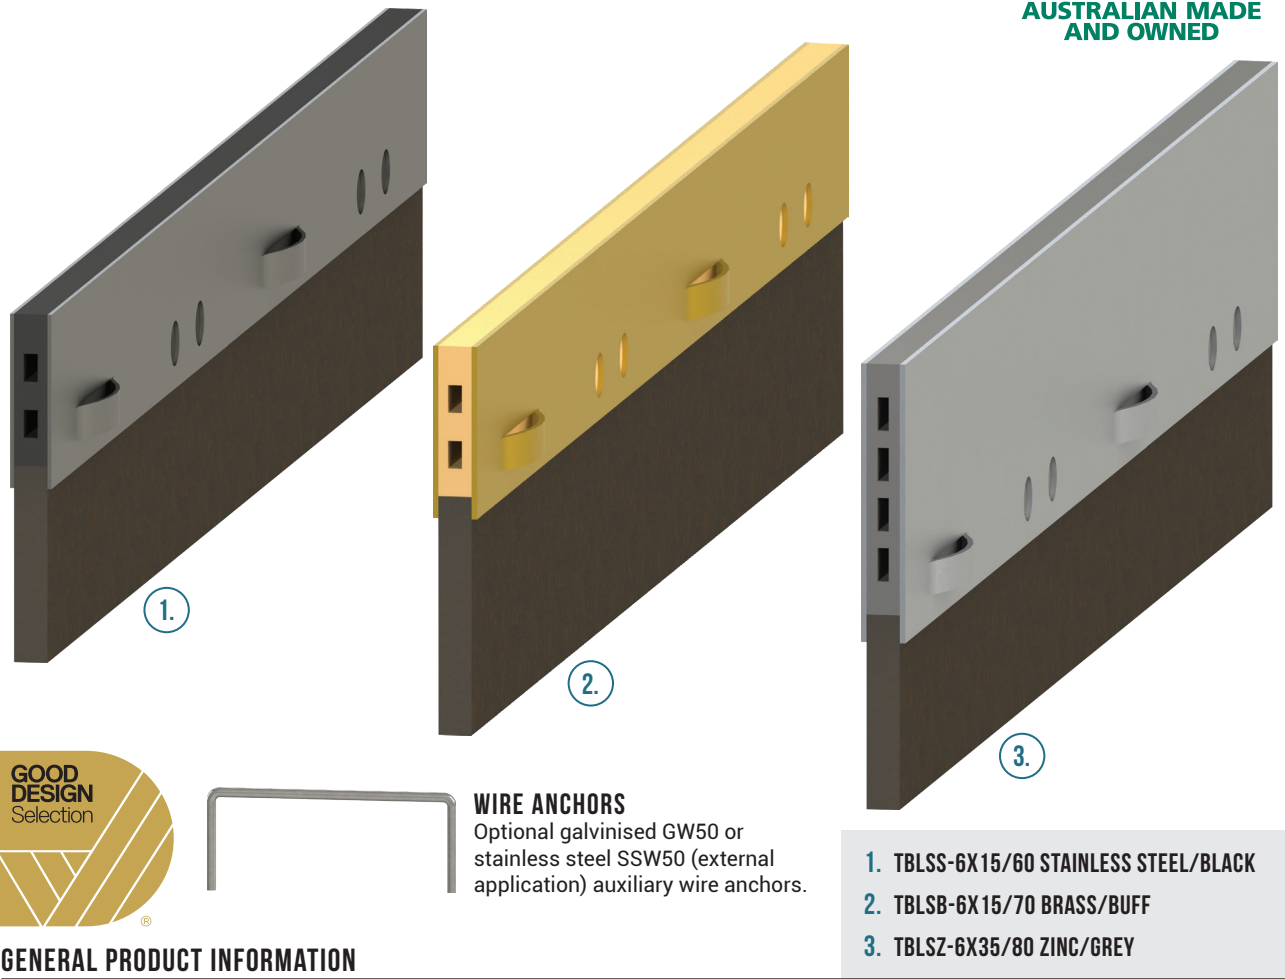

GENERAL PRODUCT INFORMATION

- Supplied in standard lengths of 1800mm.
- Loc® Strips are specifically designed for use with optional GW50/SSW50 Wire Anchors for maximum control.
- Product profile illustrations approximately 66% full size.

| 6MM WIDE NEOPRENE-X-PANSION LOC STRIP PROFILE GUIDE | | | | |
|---|---------------------------------|--|---------------------------|--|
| Specify Neoprene Colour, Wire Anchors and Overall Depth of the product ?? | | | | |
| Brass (1mm thick side plates) | Zinc (1mm thick side plates) | Stainless Steel (0.7mm thick side plates) | Metal Side Plate Depth | Accommodates Paving Maximum Thickness (with GW-50/SSW-50 wire anchors in place) |
| TBLSB-6 x 15/?? | TBLSZ-6 x 15/?? | TBLSS-6 x 15/?? | 31mm | 15mm |
| TBLSB-6 x 35/?? | TBLSZ-6 x 35/?? | TBLSS-6 x 35/?? | 50mm | 35mm |
| TBLSB-6 x 50/?? | TBLSZ-6 x 50/?? | TBLSS-6 x 50/?? | 65mm | 50mm |
| TBLSB-6 x 65/?? | TBLSZ-6 x 65/?? | TBLSS-6 x 65/?? | 80mm | 65mm |
| TBLSB-6 x 75/?? | TBLSZ-6 x 75/?? | TBLSS-6 x 75/?? | 90mm | 75mm |
| TBLSB-6 x 85/?? | TBLSZ-6 x 85/?? | TBLSS-6 x 85/?? | 100mm | 85mm |
| TBLSB-6 x 100/?? | TBLSZ-6 x 100/?? | TBLSS-6 x 100/?? | 115mm | 100mm |
| Custom heights to accommodate custom floor finish thicknesses available on request. | | | | |
| ?? Denotes overall depth of the product required. | | | | |

NEOPRENE INFILL COLOUR OPTIONS

| | | | | | |
|----|------|----|------|----|-------|
| BU | Buff | GR | Grey | BL | Black |
|----|------|----|------|----|-------|

METAL SIDE PLATE OPTIONS

| | | | | | |
|----|--------------|----|-------------|----|--------------------------|
| BR | Brass 1mm | ZN | Zinc 1mm | SS | Stainless Steel 0.7mm |
|----|--------------|----|-------------|----|--------------------------|