


NBDS-30 to NBDS-155 No Bump Floor-to-Floor Expansion Joint Cover with Stainless Steel Deck



Features

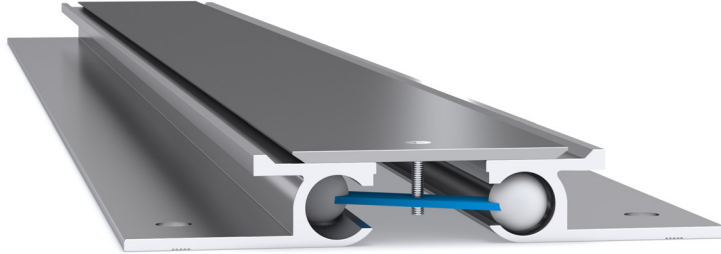

The NBDS Series no-bump, recessed floor-to-floor expansion joint covers are designed for applications where a very smooth transition is demanded such as acute hospital wards. They are a robust system that carries a stainless steel cover plate and typically are installed with timber, tile, vinyl and direct-stick carpet applications.

TECHNICAL CHARACTERISTICS

Illustrated: NBDS-30


Stainless Steel Code Smooth Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
NBDS-30	30	93	75	9	3	68	+34/-6mm	40mm	25mm	3mm
NBDS-53	53	118	100	9	3	68	+34/-6mm	40mm	25mm	3mm
NBDS-80	80	143	125	9	3	68	+34/-6mm	40mm	25mm	3mm
NBDS-105	105	168	150	9	3	68	+34/-6mm	40mm	25mm	3mm
NBDS-155	155	218	200	9	3	68	+34/-6mm	40mm	25mm	3mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade 2B finish stainless steel cover plate.
- Supplied in 3050mm lengths.
- Spring steel treated centring bar with nylon spherical balls at ~475mm centres.

Fixings

- Side members factory drilled with 10mm holes at ~475mm centres for superior securing.

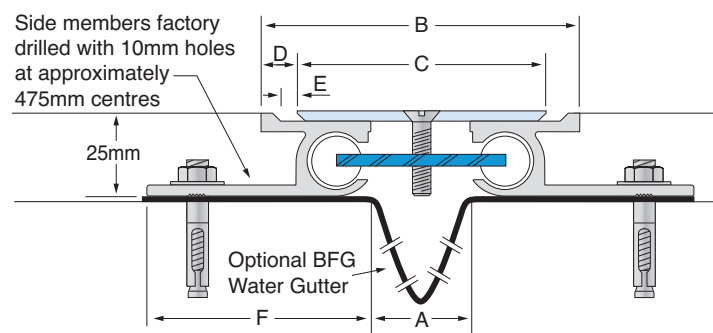

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue