



Features



Multidirectional
6-way Movement



Indoor Use



Water Gutter
Available



Outdoor Use



VW Application


- ➔ Expansion joint covers.
- ➔ Can carry a BFG wind/vapour barrier if required.

Materials


- ➔ Aluminium 6063-T5 mill finish alloy.
- ➔ Supplied in 3050mm lengths.
- ➔ Standard grey Santoprene inserts, or black inserts available on request.

VW-75 to VW-150 Aluminium Wall & Ceiling Expansion Joint Covers

VW Series wall and ceiling expansion joint covers are designed for internal and external applications, they can carry a secondary wind/vapour barrier, they are usually considered for installation on block work walls or internally in cement sheet walls, but are suitable for installation in most applications.

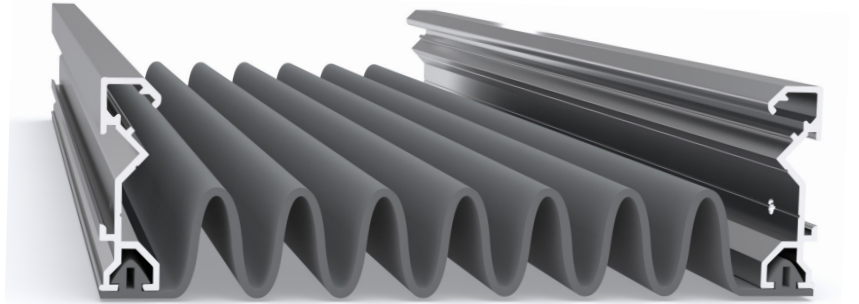

Illustrated: VW-100

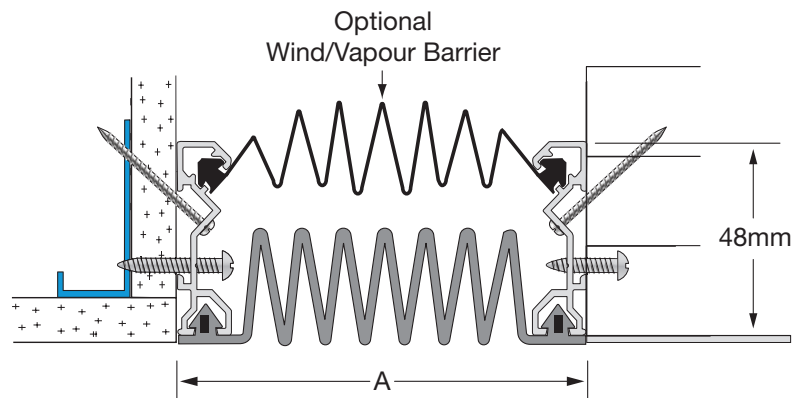

TECHNICAL CHARACTERISTICS

Aluminium Code	A	Movement	Total Available Movement
VW-75	75	+85/-35mm	120mm
VW-100	100	+90/-60mm	150mm
VW-150*	150	+/-85mm	170mm

*Denotes optional BFG wind/vapour barrier rather than concertina barrier.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- ➔ PDF & DWG Details
- ➔ Architectural Specs
- ➔ Warranty Details
- ➔ Product Information
- ➔ Fire Rated Systems
- ➔ Working Video
- ➔ Joint Cover Specs
- ➔ Product Catalogue