

HHa-25 to HHA-200 Aluminium Floor-to-Floor Expansion Joint Cover with Ribbed Deck



Features



Multidirectional 6-way Movement



Water Gutter Available



Indoor Use



Outdoor Use




Anti-Tamper Tie Bar Screws Available



Slip Resistant Sumo Grip (P4) Coating Available



Fire Rateable

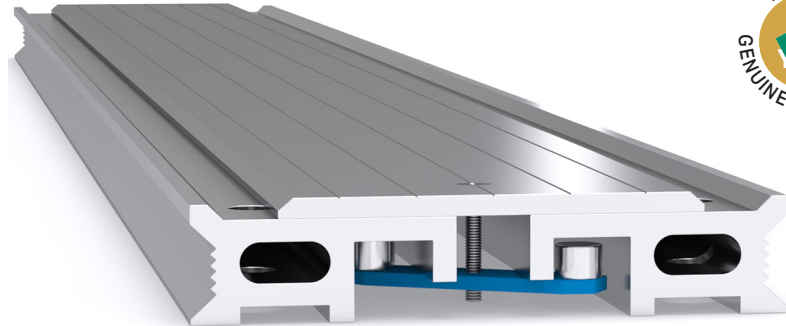

The HHA Series Heavy-Duty Pedestrian expansion joint covers are designed for heavy-duty pedestrian applications. They can accept heavier traffic (subject to the load and the span) such as EWP's. For more load information contact Latham Australia who can supply point loads to suit various traffic loads and wheel sizes. For regular vehicular traffic, the HDS or EHDF Series should be considered.

TECHNICAL CHARACTERISTICS

Illustrated: HHA-25

Aluminium Code Ribbed Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
HHa-25	25	125	90	18	12	50	+25/-12mm	37mm	25mm	5mm
HHa-50	50	150	115	18	12	50	+/-25mm	50mm	25mm	5mm
HHa-75	75	175	140	18	12	50	+/-25mm	50mm	25mm	5mm
HHa-100	100	200	165	18	12	50	+/-25mm	50mm	26mm	6mm
HHa-150●	150	250	215	18	12	50	+/-25mm	50mm	26mm	6mm
HHa-200●	200	300	265	18	12	50	+/-25mm	50mm	27mm	7mm


● Denotes smooth deck

Materials

- Aluminium 6063-T5 mill finish alloy.
- Spring steel treated centring bar with cylindrical pins at ~475mm centres.
- Supplied in 3050mm lengths.

Fixings

- Side members factory drilled to accept 8mm countersunk head fixings at ~350mm centres.

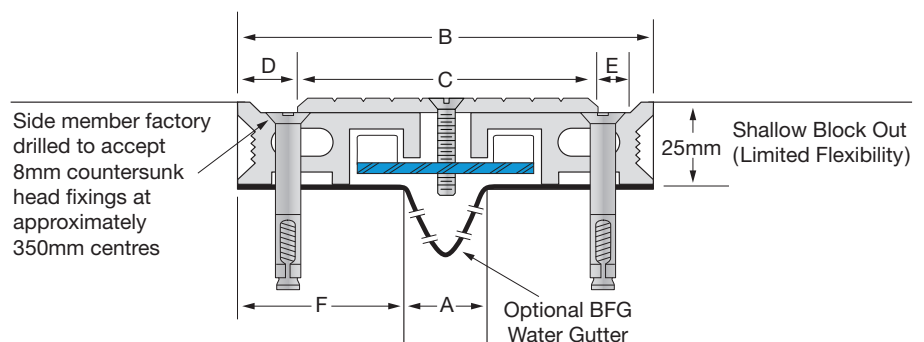

Wider joint widths available on request.

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue

+61 2 9879 7888

joints@latham-australia.com

Designs and specifications subject to change without notice.

