



**GOOD
DESIGN
AWARD®
WINNER**



Features



Multidirectional
4-way Movement



Indoor Use



Application

- Floor & Floor-to-Wall expansion joint covers.
- Internal light duty, moderate traffic applications only, where limited movement is expected.
- The 30-Series joint covers allow a maximum of $\pm 3\text{mm}$ of horizontal movement.
- The 30-Series offers the opportunity to use the most similar joint cover in the wall and ceiling to the floor. This is particularly effective when the construction joint forms a square box shape. See WR and WCR Series.

Materials

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 4000mm lengths.
- Standard replaceable synthetic rubber inserts are grey. Beige or black can be supplied on request.

Fixings

- Side members factory drilled with 10mm holes at $\sim 475\text{mm}$ centres.
- Wall members factory drilled to accept 8mm gauge screw and plug at $\sim 475\text{mm}$ centres on request.

FOR FURTHER TECHNICAL
SPECIFICATIONS VISIT
WWW.LATHAM-AUSTRALIA.COM

INSERT COLOUR SELECTION



Grey





Black





Beige



30-FTSR & 30-FTWSR Aluminium Floor & Floor-to-Wall Expansion Joint Covers

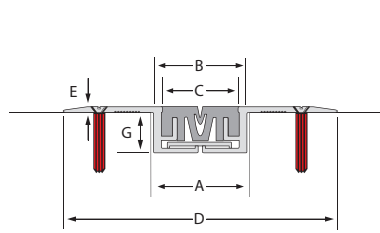

30-FCSR & 30-FCWSR (Carpet) Aluminium Floor & Floor-to-Wall Expansion Joint Covers

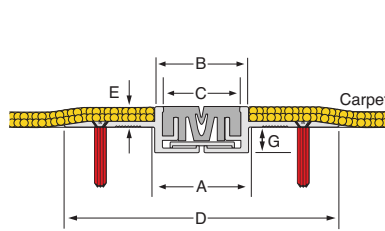

30-FTVR & 30-FTWVR (Vinyl) Aluminium Floor & Floor-to-Wall Expansion Joint Covers

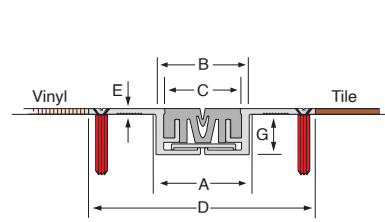



TECHNICAL CHARACTERISTICS

Factory drilling available on request

Aluminium Code	A	B	C	D	E	F	G	Movement	Total Available Movement	Overall Depth
30-FTSR	38	36	30	115	3	n/a	16	$\pm 3\text{mm}$	6mm	19mm
30-FTWSR	38	33	30	85	3	38	16	$\pm 3\text{mm}$	6mm	57mm
30-FCSR	38	36	30	115	8	n/a	16	$\pm 3\text{mm}$	6mm	18mm
30-FCWSR	38	33	30	85	8	38	16	$\pm 3\text{mm}$	6mm	54mm
30-FTVR	38	36	30	93	3	n/a	16	$\pm 3\text{mm}$	6mm	19mm
30-FTWVR	38	33	30	74	3	38	16	$\pm 3\text{mm}$	6mm	52mm

Type 30-WR & Type 30-WCR Aluminium Wall & Ceiling Expansion Joint Covers

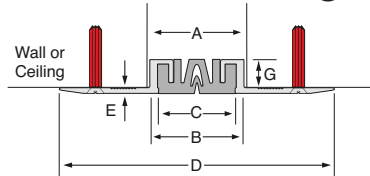

TECHNICAL CHARACTERISTICS

Factory drilling available on request

Aluminium Code	A	B	C	D	E	F	G	Movement	Total Available Movement	Overall Depth
30-WR	38	36	30	115	3	n/a	20	$\pm 3\text{mm}$	6mm	23mm
30-WCR	38	33	30	85	3	38	20	$\pm 3\text{mm}$	6mm	58mm