


FRL-25 to FRL-150 Aluminium Roof-to-Parapet Expansion Joint Cover



Features

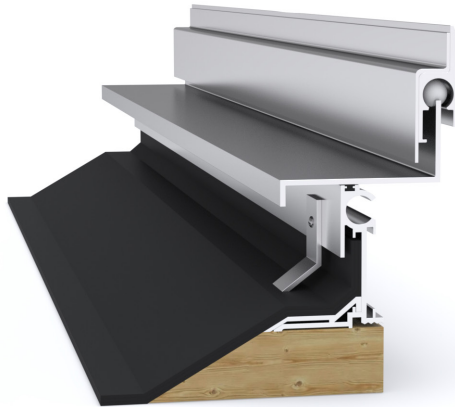

Multidirectional
6-way Movement



Water Gutter
Included



Outdoor Use



Fire Rateable



Anti-Tamper
Tie Bar Screws
Available

The FRL Series roof-line expansion joint covers are for concrete or metal roof-to-parapet applications with hobs. They are designed to combine with the roof sheet membrane which runs up the side of the expansion joint cover, and for installation on flat concrete or metal roofs. The system comes standard with a BFG water gutter. Splice plates can be supplied where cover plates are abutted to ensure water tightness. As standard the material is supplied in mill finish aluminium. On request, Latham can have the material powder coated or anodised to a required colour or finish.

Materials

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.


Fixings

- Side member factory drilled with 10mm holes at ~475mm centres.
- Wall member factory drilled to accept 6.5mm fixings at ~475mm centres.
- Membrane hold-down clips are supplied for installation at ~500mm centres.
- End Closures, Transition Splices, Corners, and Tee's should be considered for roof joints.
- Contact a Latham representative for more information.

TECHNICAL CHARACTERISTICS

Illustrated: FRL-50

Aluminium Code	A	B	C	Movement	Total Available Movement
FRL-25	25	75	64	+20/-15mm	35mm
FRL-50	50	108	64	+25/-40mm	65mm
FRL-75	75	132	64	+25/-65mm	90mm
FRL-100	100	158	64	+25/-90mm	115mm
FRL-150	150	208	64	+25/-140mm	165mm

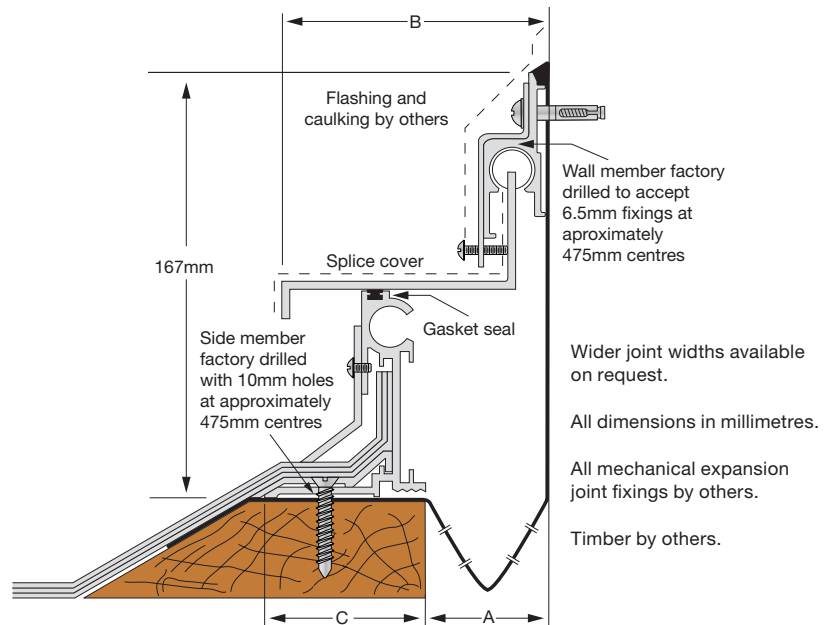

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue