


FPL-25 to FPL-150 Aluminium Roof-to-Parapet Expansion Joint Cover



Features

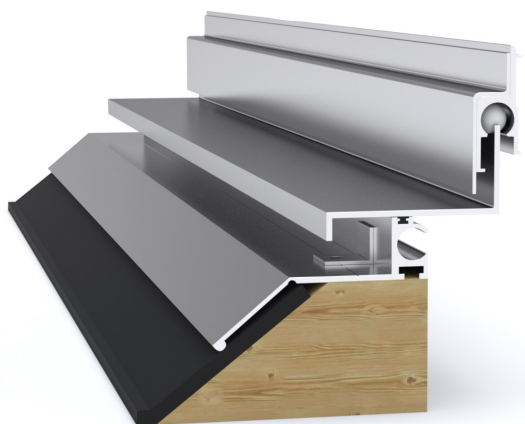

Multidirectional
6-way Movement



Water Gutter
Included



Outdoor Use



Fire Rateable



Anti-Tamper
Tie Bar Screws
Available

The FPL Series roof-line expansion joint covers are designed for concrete or metal roof-to-parapet applications with hobs. They combine with the roof sheet membrane which runs under the side of the expansion joint cover. They are for installation on flat concrete or metal roofs, on concrete or timber hobs. The system comes standard with a BFG water gutter. Splice plates can be supplied where cover plates are abutted to ensure water tightness. As standard the material is supplied in mill finish aluminium. On request, Latham can have the material powder coated or anodised to a required colour or finish.

Materials

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.


Fixings

- Side member factory drilled with 10mm holes at ~475mm centres.
- Wall member factory drilled to accept 6.5mm fixings at ~475mm centres.
- End Closures, Transition Splices, Corners, and Tees should be considered for roof joints.
- Contact a Latham representative for more information.

TECHNICAL CHARACTERISTICS

Illustrated: FPL-50

Aluminium Code	A	B	C	Movement	Total Available Movement
FPL-25	25	75	70	+20/-15mm	35mm
FPL-50	50	108	70	+25/-40mm	65mm
FPL-75	75	132	70	+25/-65mm	90mm
FPL-100	100	158	70	+25/-90mm	115mm
FPL-150	150	208	70	+25/-140mm	165mm

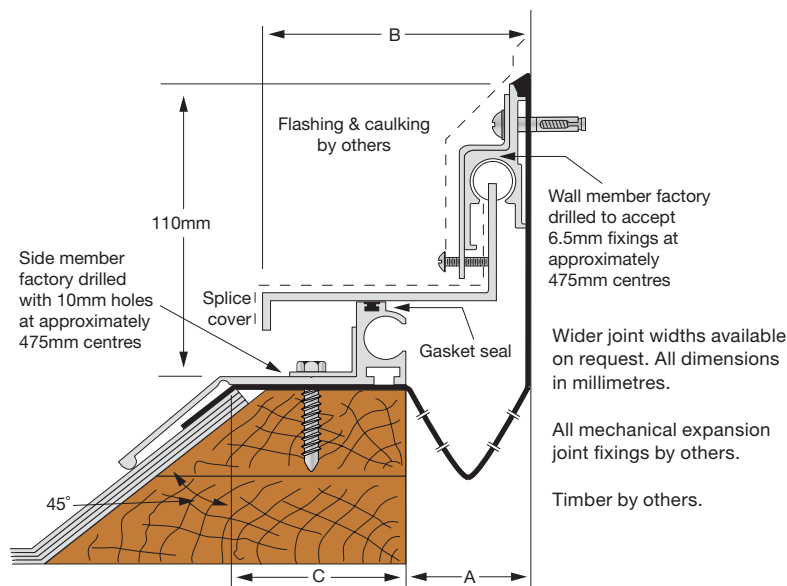

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue