


IWSM-100 to IWSM-600 Aluminium Wall & Ceiling Expansion Joint Covers

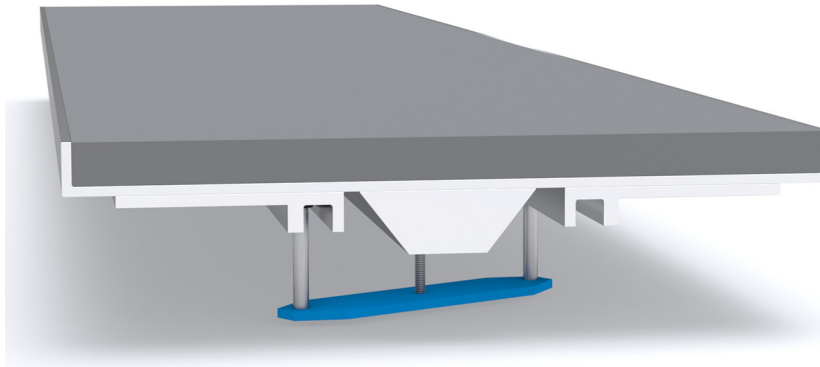

The IWSM Seismic Series wall and ceiling expansion joint covers are designed for installation in wall and ceiling applications. The cover plate is designed to accommodate 13mm plasterboard. The series is designed to accommodate normal thermal movement of the day-to-day requirements of the structure while accommodating extreme multidirectional movement during seismic events. As standard, the system is supplied in mill finish aluminium.

TECHNICAL CHARACTERISTICS				Illustrated: IWSM-100	
Aluminium Code	A	B	C	Movement	Total Available Movement
IWSM-100	100	232	30	+100/-60mm	160mm
IWSM-150	150	332	55	+150/-110mm	260mm
IWSM-200	200	432	80	+200/-160mm	360mm
IWSM-250	250	532	105	+250/-210mm	460mm
IWSM-300	300	632	130	+300/-260mm	560mm
IWSM-400	400	832	180	+400/-360mm	760mm
IWSM-500	500	1032	230	+500/-460mm	960mm
IWSM-600	600	1323	280	+600/-560mm	1160mm

Features



Multidirectional 6-way Movement



Water Gutter Available



Indoor Use



Outdoor Use




Seismic Movement



Fire Rateable

Materials

- Aluminium 6063-T5 mill finish alloy.
- Spring steel treated centring bar with cylindrical pins at ~475mm centres.
- Supplied in 3000mm lengths.

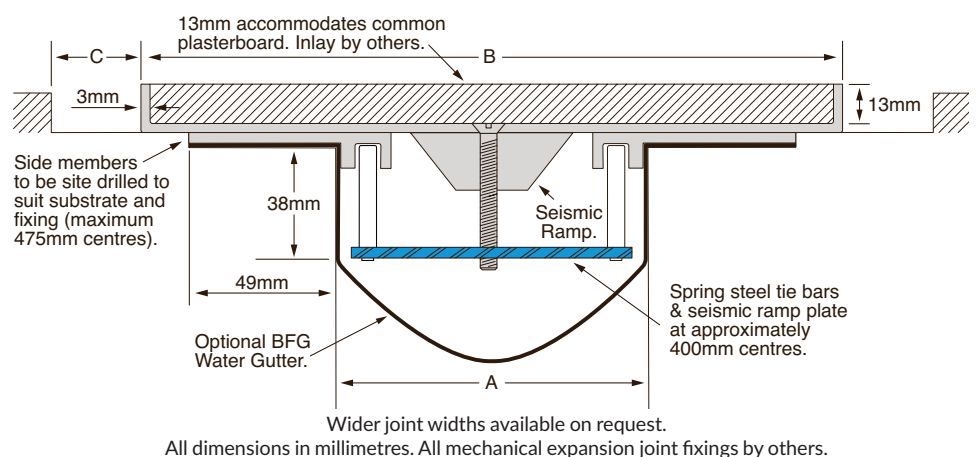

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue