SAA-44 (SSSM ▲) to SAA-150 (SSSM ▲)

Aluminium Floor-to-Floor Expansion Joint Cover with Ribbed Deck

AUSTRALIAN MADE AND OWNED

GOOD DESIGN AWARD® WINNER

LATHAM 5 Year GENUINE WARRANTY

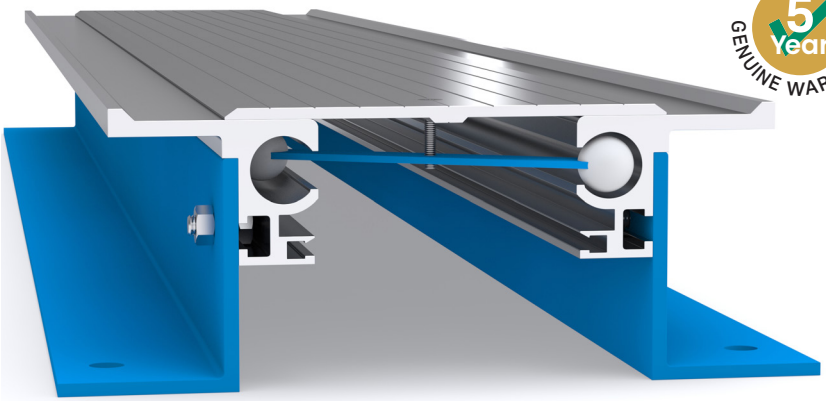

Features

- Multidirectional 6-way Movement
- Water Gutter Available
- Indoor Use
- Outdoor Use
- Anti-Tamper Tie Bar Screws Available
- Slip Resistant Sumo Grip (P4) Coating Available
- Fire Rateable

The SAA (SSSM) Ultimate Series robust, variable height floor-to-floor expansion joint covers are available in a range of sizes to accommodate deep flooring finishes. Depths available are 79mm, 89mm, 104mm, 114mm, 139mm and 164mm. The SAA (SSSM) Series are intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, pavers and stone. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS Illustrated: SAA-75 (SSSM 79)

Aluminium Code Ribbed Deck	A	B	C	D	E	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
SAA-44 (SSSM ▲)	44	163	100	32	26	+50/-40mm	90mm	Specify	3mm
SAA-75 (SSSM ▲)	70	189	125	32	26	+/-50mm	100mm	Specify	3mm
SAA-100 (SSSM ▲)	95	214	150	32	26	+/-50mm	100mm	Specify	3mm
SAA-150 (SSSM ▲)	145	264	200	32	26	+/-50mm	100mm	Specify	5mm

Code ▲ Depth Detail	G
SSSM 79	85
SSSM 89	95
SSSM 104	110

Code ▲ Depth Detail	G
SSSM 114	95
SSSM 139	95
SSSM 164	110

▲ Specify required depth i.e. SAS-75 (SSSM 79) as drawn. Available depths: 79mm, 89mm, 104mm, 114mm, 139mm & 164mm. "F" distance subject to required depth. See code depth detail.

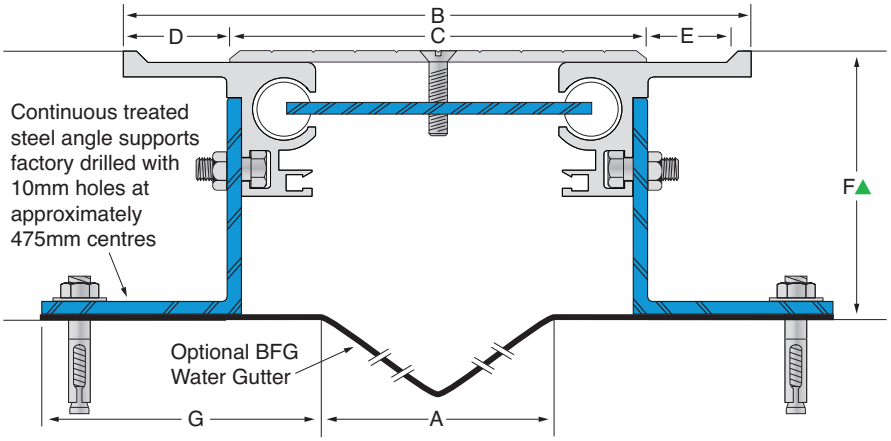

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Materials

- Aluminium 6063-T5 mill finish alloy.
- Treated steel angle supports.
- Supplied in 3050mm lengths.
- Spring steel treated centring bar with nylon spherical balls at ~475mm centres.

Fixings

- Cover plates wider than 175mm will be supplied in smooth aluminium. Consider an optional slip-resistant coating for these.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Product Information
- Joint Cover Specs
- Architectural Specs
- Fire Rated Systems
- Product Catalogue
- Warranty Details
- Working Video

+61 2 9879 7888
joints@latham-australia.com

Designs and specifications subject to change without notice.

LATHAM
www.latham-australia.com